



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
15.01.1997 Bulletin 1997/03

(51) Int Cl.<sup>6</sup>: **H04N 7/26**

(21) Application number: **96305038.0**

(22) Date of filing: **09.07.1996**

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **14.07.1995 JP 178642/95**  
**14.07.1995 JP 178643/95**  
**24.10.1995 JP 275501/95**

(71) Applicant: **SHARP KABUSHIKI KAISHA**  
**Osaka 545 (JP)**

(72) Inventors:  
• **Katata, Hiroyuki**  
**Chiba-shi, Chiba (JP)**

• **Kusao, Hiroshi**  
**Chiba-shi, Chiba (JP)**  
• **Ito, Norio**  
**Chiba-shi, Chiba (JP)**  
• **Nomura, Toshio**  
**Ichihara-shi, Chiba (JP)**

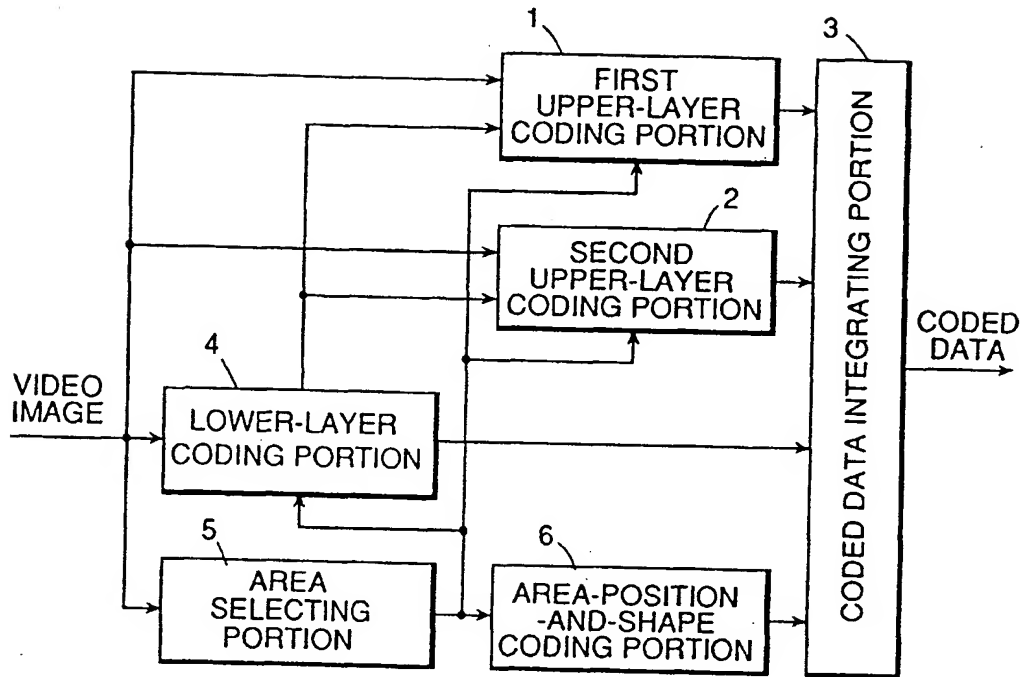
(74) Representative: **Brown, Kenneth Richard et al**  
**R.G.C. Jenkins & Co.**  
**26 Caxton Street**  
**London SW1H 0RJ (GB)**

(54) **Hierarchical video coding device and decoding device**

(57) In a video coding device capable of making coded data have a hierarchical structure, a specified area of each frame is selected, the position and the shape of the selected area are encoded, a pixel value of the selected area is encoded as lower-layer coded data, a pixel value of a whole image is encoded as first upper-layer coded data by using pixel values of already decoded images of the lower-layer and the first upper layer and a pixel value of the selected area is encoded as second upper-layer coded data by using pixel values of already decoded images of the lower-layer and the second upper layer. By the video coding device and video decoding device mentioned above, decoding a part of coded data makes it possible to reproduce only a selected area of a lower image-quality or reproduce a whole image of a lower image-quality or reproduce a whole image with a selected area of a higher image-quality and other areas of a lower image-quality. In encoding and decoding a background video-sequence and a plurality of foreground part-video-sequences, a coding device (101, 102, 103, 122, 123, 120) encodes position information of part-video-sequences and a decoding device (105, 106, 107, 108, 109, 110, 124, 125, 121) prepares weight values necessary for weighted-mean image synthesizing on the basis of the coded data of the position information data, whereby each part-video-sequences is synthesized with the background video-sequence by using the weighted mean values. And in laying a plurality of part-video-sequences over a background video-sequence by using weighted mean values, an amount of coded data can be reduced because

the weighted mean values are prepared from binarized information. Furthermore, a synthesized video-sequence has a smoothed boundary between the part images and the background image can be smoothly synthesized without any visual defect since the weighted mean data prepared from the binarized information gets a value of 0 to 1. In synthesizing an lower-layer frame from preceding and proceeding lower-layer frames by using a first part-area-information and a second part-area-information of lower-layer frames existing temporally before and after the synthesizable frame, the temporally preceding and proceeding lower-layer frames previously averaged with weight is used for synthesizing an overlapped portion of a first part-area with a second part-area or an area not belonging to the first part-area and the second part-area on the synthesizable frame, the temporally proceeding lower-layer frame used for synthesizing an area belonging to the first part-area only and the temporally preceding lower-layer frame is used for synthesizing an area belonging to the second part-area only. By the video coding device and video decoding device with the synthesizing method as above described, the synthesizing image is free from the distortion occurred in the prior art image aforementioned.

FIG.5



## Description

## BACKGROUND OF THE INVENTION

5 The present invention pertains to the field of art for digital video processing and relates particularly to a video coding device for encoding video data at a high efficiency and a video decoding device for decoding coded data prepared by said video coding device at a high efficiency.

There has been proposed a video coding method which is capable of encoding a specified area to be of a higher image quality than that of other areas.

10 A video coding method described in references ISO/IEC JTC1/SC29/WG11 MPEG95/030 is such that selects a specified area and makes it (hereinafter referred to as selected area) encoded to have a higher image quality by controlling quantizer step sizes and time resolution.

Another conventional method shows an area-selecting portion intended to select a specified area of a video image. In case of selecting, e.g., a face area of a video image on a display of a video telephone, it is possible to select an area by using a method that is described in a reference material "Real-time auto face-tracking system (The Institute of Image Electronics Engineers of Japan, Previewing Report of Society Meeting, 93-04-04, pp. 13-16, 1993).

15 An area-position-and-shape coding portion encodes a position and a shape of a selected area. An optional shape may be encoded by using, e.g., chain codes. The coded position and shape are assembled into coded data and transferred or accumulated by a coded-data integrating portion.

20 A coded-parameter adjusting portion adjusts a variety of parameters usable for controlling image quality or data amount in video encoding so that the area-position-and-shape coding position may encode a selected area to get a higher image quality than that of other areas.

A parameter coding portion encodes a variety of adjusted parameters. The coded parameters are assembled into coded data and transferred or accumulated by a coded-data integrating portion. The video coding portion encodes 25 input video data by using a variety of the parameters by a combination of conventional coding methods such as motion compensative prediction, orthogonal transformation, quantization and variable length coding. The coded video data is assembled into a coded data by the coded data integrating portion, then the coded data is transferred or accumulated.

The selected area is thus encoded to have a higher image quality than that of other areas.

30 As mentioned above, the conventional art improves quality of a selected area image by allocating more quantity of bits thereto by adjusting parameters such as quantizer step sizes, spatial resolution, time resolution. The conventional art, however, includes such problems that it can not obtain a specified area image by decoding a part of decoded data and/or obtain a decoded area image having a relatively low quality because of a selected area and other areas being included in the same group of coded data. Recently, many studies have been made on hierarchical structure of coded data but have not succeeded in creating a system that allows the selection of a specified area.

35 There has been studied a video coding method which is adapted to synthesize different kinds of video sequences.

A paper "Image coding using hierarchical representation and multiple templates" appeared in Technical Report of IEICE (Institute of Electronics Information and Communication Engineers) IE94-159, pp. 99 - 106, 1995, describes such an image synthesizing method that combines a video-sequence being a background video and a part-video-sequence being a foreground video (e.g., a figure image or a fish image cut-out by using the chromakey technique) to 40 produce a new sequence.

In a conventional method, a first video-sequence is assumed to be a background video and a second video-sequence is assumed to be a part video. An alpha plane is weight data used when synthesizing a part image with a background image in a moving picture (video) sequence. There has been proposed an exemplified image made of pixels weighted with values of 1 to 0. The alpha-plane data is assumed to be 1 within a part and 0 out of a part. The 45 alpha data may have a value of 0 to 1 in a boundary portion between a part and the outside thereof in order to indicate a mixed state of pixel values in the boundary portion and transparency of transparent substance such as glass.

In the conventional method, a first video-coding portion encodes the first video-sequence and a second video-coding portion encodes the second video-sequence according to an international standard video-coding system, e.g., MPEG or H.261. An alpha-plane coding portion encodes an alpha-plane. In the above-mentioned paper, this portion 50 uses the techniques of vector value quantizing and Haar transformation. A coded-data integrating portion (not shown) integrates coded data received from the coding portions and accumulates or transmits the integrated coded data.

In the decoding device of the conventional method, a coded-data disassembling portion (not shown) disassembles coded data into the coded data of the first video-sequence, the coded data of the second video-sequence and the coded data of the alpha-plane, which are then decoded respectively by a first video-decoding portion, a second video-decoding portion and an alpha-plane decoding portion. Two decoded sequences are synthesized according to weighted 55 mean values by a first weighting portion, a second weighting portion and adder. The first video-sequence and the second video-sequence are combined according to the following equation:

$$f(x,y,t) = (1 - \alpha(x,y,t))f_1(x,y,t) + \alpha(x,y,t)f_2(x,y,t)$$

In the equation, (x,y) represents coordinate data of an intraframe pixel position, t denotes a frame time,  $f_1(x,y,t)$  represents a pixel value of the first video sequence,  $f_2(x,y,t)$  represents a pixel value of the second video sequence,  $f(x,y,t)$  represents a pixel value of the synthesized video sequence and  $\alpha(x,y,t)$  represents alpha-plane data. Namely, the first weighting portion uses  $1-\alpha(x,y,t)$  as a weight while the second weighting portion uses  $\alpha(x,y,t)$  as a weight. As mentioned above, the conventional method produces a large number of coded data because it must encode alpha-plane data.

To avoid this problem, saving the information amount by binarizing alpha-plane data may be considered, but it is accompanied by such a visual defect that tooth-like line appears at the boundary between a part image and a background as the result of discontinuous change of pixel values thereabout.

There has been studied a video coding method that is adapted to synthesize different kinds of video sequences.

A paper "Image coding using hierarchical representation and multiple templates" appeared in Technical Report of IEICE IE94-159, pp. 99 - 106, 1995, describes such an image synthesizing method that combines a video-sequence being a background video and a part-video-sequence being a foreground video (e.g., a figure image or a fish image cut-out by using the chromakey technique) to produce a new sequence.

A paper "Temporal Scalability based on image content" (ISO/IEC JTC1/SC29/WG11 MPEG95/211, (1995)) describes a technique for preparing a new video-sequence by synthesizing a part-video sequence of a high frame rate with a video-sequence of a low frame rate. This system is to encode an lower-layer frame at a low frame-rate by prediction coding method and to encode only a selected area of an upper-layer frame at a high frame rate by prediction coding. The upper layer does not encode a frame coded at the lower-layer and uses a copy of the decoded image of the lower-layer. The selected area may be considered to be a remarkable part of image, e.g., a human figure.

In a conventional method, at the coding side, an input video-sequence is thinned by a first thinning portion and a second thinning portion and the thinned video-sequence with a reduced frame rate is then transferred to an upper-layer coding portion and an lower-layer coding portion respectively. The upper-layer coding portion has a frame rate higher than that of the lower-layer coding portion.

The lower-layer coding portion encodes a whole image of each frame in the received video-sequence by using an international standard video-coding method such as MPEG, H.261 and so on. The lower-layer coding portion also prepares decoded frames which are used for prediction coding and, at the same time, are inputted into a synthesizing portion.

In a code-amount control portion of a conventional coding portion, a coding portion encodes video frames by using a method or a combination of methods such as motion compensative prediction, orthogonal transformation, quantization, variable length coding and so on. A quantization-width (step-size) determining portion determines a quantization width (step size) to be used in a coding portion. A coded-data amount determining portion calculates an accumulated amount of generated coded data. Generally, the quantization width is increased or decreased to prevent increase or decrease of coded data amount.

The upper-layer coding portion encodes only a selected part of each frame in a received video-sequence on the basis of an area information by using an international standard video-coding method such as MPEG, H.261 and so on. However, frames encoded at the lower-layer coding portion are not encoded by the upper-layer coding portion. The area information is information indicating a selected area of, e.g., an image of a human figure in each video frame, which is a binarized image taking 1 in the selected area and 0 outside the selected area. The upper-layer coding portion also prepares decoded selected areas of each frame, which are transferred to the synthesizing portion.

An area-information coding portion encodes an area information by using 8-directional quantizing codes. The 8-directional quantizing code is a numeric code indicating a direction to a proceeding point and it is usually used for representing digital graphics.

A synthesizing portion outputs a decoded lower-layer video-frame which has been encoded by lower-layer coding portion and is to be synthesized. When a frame to be synthesized but has not been encoded at the lower-layer coding portion, the synthesizing portion outputs a decoded video-frame that is generated by using two decoded frames, which have been encoded at the lower-layer and stand before and after the lacking lower-layer frame, and one decoded upper-layer frame to be synthesized. The two lower-layer frames stand before and after the upper-layer frame. The synthesized video-frame is inputted into the upper-layer coding portion to be used therein for predictive coding. The image processing in the synthesizing portion is as follows:

An interpolating image is first prepared for two lower-layer frames. A decoded image of the lower-layer at time t is expressed as  $B(x,y,t)$ , where x and y are co-ordinates defining the position of a pixel in a space. When the two decoded images of the lower-layer are located at time  $t_1$  and  $t_2$  and the decoded image of the upper-layer is located at  $t_3$  ( $t_1 < t_3 < t_2$ ), the interpolating image  $I(x,y,t_3)$  of time  $t_3$  is calculated according to the following equation (1):

$$I(x,y,t_3) = [(t_2-t_3)B(x,y,t_1) + (t_3-t_1)B(x,y,t_2)]/(t_2-t_1) \quad (1)$$

The decoded image E of the upper layer is then synthesized with the obtained interpolating image I by using synthesizing weight information W(x,y,t) prepared from area information. A synthesized image S is defined according to the following equation:

$$S(x,y,t) = [1-W(x,y,t)]I(x,y,t) + E(x,y,t)W(x,y,t) \quad (2)$$

The area information M(x,y,t) is a binarized image taking 1 in a selected area and 0 outside the selected area. The weight information W(x,y,t) can be obtained by processing the above-mentioned binarized image several times with a low-pass filter. Namely, the weight information W(x,y,t) takes 1 within a selected area, 0 outside the selected area and a value of 0 to 1 at boundary of the selected area.

The coded data prepared by the lower-layer coding portion, the upper-layer coding portion and the area information coding portion is integrated by an integrating portion (not shown) and then is transmitted or accumulated.

In the decoding side of the conventional system, a coded data disassembling portion (not shown) separates coded data into lower-layer coded data, upper-layer coded data and area-information coded data. These coded data are decoded respectively by a lower-layer decoding portion, an upper-layer decoding portion and an area information decoding portion.

A synthesizing portion of the decoding side is similar in construction to the synthesizing portion. It synthesizes an image by using a decoded lower-layer image and a decoded upper-layer image according to the same method as described at the coding side. The synthesized video frame is displayed on a display screen and, at the same time, is inputted into the upper layer decoding portion to be used for prediction thereat.

The above-described decoding device decodes both lower-layer and the upper-layer frames, but a decoding device consisting of an lower-layer decoding portion is also applied, omitting the upper-layer coding portion and the synthesizing portion. This simplified decoding device can reproduce a part of coded data.

Problems to be solved by the present invention:

(1) As mentioned above, the conventional art obtains an output image from two lower-layer decoded images and one upper-layer decoded image by previously preparing an interpolating image of two lower-layer frames and, therefore, encounters such a problem that the output image may be considerably deteriorated with a large distortion occurred around a selected area therein if the position of said selected area changes with time.

The above-mentioned problem is described as follows:

Images A and C are two decoded lower-layer frames and an image B is a decoded upper-layer frame. The images are displayed in the time order A, B and C. Because the selected area moves, an interpolating image determined from the images A and B shows two selected areas overlapped with each other. The image B is further synthesized with the interpolating image by using weight information. An output image has three selected areas overlapped with each other. Two selected areas of the lower-layer image appear like afterimage around the selected area image of the upper-layer, thereby considerably deteriorating the quality of an image. Because the lower-layer frames are normal and only synthesized frames have the above-mentioned distortion, the video sequence may be displayed with periodical flicker-like distortion that considerably impairs the video image-quality.

(2) The conventional art uses eight-directional quantizing codes for encoding area information. In case of encoding the area-information of a low bit-rate or of a complicated-shape area, an amount of coded area-information increases and takes a large portion of the total amount of coded data, that may cause the deterioration of the image quality.

(3) The conventional art obtains weight information by making the area information pass through a low-pass filter several times. This increases an amount of processing operations.

(4) The conventional art uses predictive coding method. However, the predictive coding the lower-layer frames may cause a large distortion if a screen change occurs in a video sequence. The distortion of any lower-layer frame may propagate a related upper-layer images, resulting in the prolonged distortion of the video.

(5) According to the conventional art, each lower-layer frame is encoded by using an international standard video-coding method (e.g., MPEG and H.261), thereby a selected area image differs little in quality from other areas. On the contrary, in each upper-layer frame, only a selected area is encoded to be of a high quality, thereby the quality of the selected area image may vary with time. This is sensed as a flicker-like distortion that is a problem.

## SUMMARY OF THE INVENTION

Accordingly, an object of the present invention is to provide coding and decoding devices which are capable of encoding a selectively specified area of a video image to be of a relatively high image-quality in a whole coded video data system and which is also capable of giving a hierarchical structure of the coded data, make it possible to reproduce the specified area of the coded video image to be of a variety of image-quality and/or any other area to be of a relatively low image-quality.

With the thus constructed coding and decoding devices, a selected area of an image can be encoded and decoded to be of a higher image-quality than that of other areas by differentiating values of parameters such as spatial resolution, quantizer step sizes and time resolution. The coding device can make coded data have respective hierarchical orders and, therefore, the decoding device can easily decode a part of coded data.

Another object of the present invention is to provide a coding device and a decoding device, which are capable of generating a synthesized image from a reduced amount of coded data without deterioration of the synthesized image quality.

With the coding and decoding devices according to the present invention, the decoding device can prepare weight information for synthesizing a plurality of video-sequences by using weighted means, eliminating the necessity of encoding weight information by the coding device.

The coded data are weighted, that may totally save an amount of data to be produced.

The reverse weighting, which is performed by the decoding side, may generate weight-removed decoded data.

Another object of the present invention is to provide a coding device and a decoding device, which are free from the above-mentioned problems (described (1) to (5) as problems to be solved in prior art) and are capable of encoding video-frames with a reduced amount of coded data without deterioration of the image quality.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram for explaining a prior art.

Fig. 2 is a view for explaining a concept of coding method according to the present invention.

Fig. 3 shows an example of a concept of decoding method according to the present invention.

Fig. 4 shows another example of a concept of decoding method according to the present invention.

Fig. 5 is a block diagram showing a coding device representing an embodiment of the present invention.

Fig. 6 shows an exemplified method of encoding lower-layer, first upper-layer and second upper-layer coded data by a coding device according to the present invention.

Fig. 7 shows another exemplified method of encoding first upper-layer coded data by a coding device according to the present invention.

Fig. 8 shows another exemplified method of encoding lower-layer, first upper-layer and second upper-layer coded data by a coding device according to the present invention.

Fig. 9 shows another exemplified method of encoding lower-layer, first upper-layer and second upper-layer coded data by a coding device according to the present invention.

Fig. 10 is a block diagram showing a decoding device representing an embodiment of the present invention.

Fig. 11 is a block diagram showing a decoding device representing another embodiment of the present invention.

Fig. 12 is a block diagram showing a decoding device representing another embodiment of the present invention.

Fig. 13 is a block diagram for explaining a conventional method.

Fig. 14 shows an example of an alpha plane according to a conventional method.

Fig. 15 is a block diagram for explaining an embodiment of the present invention.

Fig. 16 shows an example of an area information according to the present invention.

Fig. 17 shows an example of a linear weight function according to the present invention.

Fig. 18 shows an example of preparing an alpha-plane according to the present invention.

Fig. 19 is a block diagram for explaining another embodiment of the present invention.

Fig. 20 is a block diagram for explaining an example of a video-coding portion in another embodiment of the present invention.

Fig. 21 is a block diagram for explaining an example of a video-decoding portion in another embodiment of the present invention.

Fig. 22 is a block diagram for explaining another example of a video-coding portion in another embodiment of the present invention.

Fig. 23 is a block diagram for explaining another example of a video-decoding portion in another embodiment of the present invention.

Fig. 24 is a block diagram for explaining another example of a video-coding portion in another embodiment of the present invention.

Fig. 25 is a block diagram for explaining another example of a video-decoding portion in another embodiment of the present invention.

Fig. 26 is a block diagram for explaining an exemplified case that an area information is not encoded in another embodiment of the present invention.

5 Fig. 27 shows a concept of a conventional method.

Fig. 28 is a block diagram for explaining a conventional coding and decoding system.

Fig. 29 is a block diagram for explaining a conventional method for controlling the number of codes.

Fig. 30 is a view for explaining an 8-directional quantizing code.

Fig. 31 is a view for explaining problems of a conventional method.

10 Fig. 32 is a block diagram for explaining an embodiment of the present invention.

Fig. 33 is a view for explaining effects of an embodiment of the present invention.

Fig. 34 is a block diagram for explaining another embodiment of the present invention.

Fig. 35 is a block diagram for explaining a coding side of another embodiment of the present invention.

Fig. 36 is a block diagram for explaining a decoding side of another embodiment of the present invention.

15 Fig. 37 shows an example of approximating an area information by using rectangles.

Fig. 38 is a block diagram for explaining another embodiment of the present invention.

Fig. 39 shows an exemplified method for preparing weighting information according to the present invention.

Fig. 40 is a block diagram for explaining another embodiment of the present invention.

Fig. 41 is a block diagram for explaining another embodiment of the present invention.

20 Fig. 42 is a view for explaining a target coefficient of codes usable for coding a selected area by a code-amount controlling method according to the present invention.

Fig. 43 is a view for explaining a target coefficient of codes usable for coding an area outside a selected area by a code-amount controlling method according to the present invention.

25 Fig. 44 is a view for explaining a target coefficient of codes usable for coding an area outside a selected area by a code-amount controlling method according to the present invention.

#### PREFERRED EMBODIMENT OF THE INVENTION

30 Fig. 1 is a block diagram showing a prior art as a reference to the present invention. An area-selecting portion 20 is intended to select a specified area of a video image. In case of selecting, e.g., a face area of a video image on a display of a video telephone, it is possible to select an area by using a method that is described in a reference material "Real-time auto face-tracking system (The Institute of Image Electronics Engineers of Japan, Previewing Report of Society Meeting, pp. 13-16, 1993).

35 In Fig. 1, an area-position-and-shape coding portion 21 encodes a position and a shape of a selected area. An optional shape may be encoded by using, e.g., chain codes. The coded position and shape are assembled into coded data and transferred or accumulated by a coded-data integrating portion 22.

A coded-parameter adjusting portion 23 adjusts a variety of parameters usable for controlling image quality or data amount in video encoding so that the area-position-and-shape coding position 21 may encode a selected area to get a higher image quality than that of other areas.

40 A parameter coding portion 24 encodes a variety of adjusted parameters. The coded parameters are assembled into coded data and transferred or accumulated by a coded-data integrating portion 22. The video coding portion 25 encodes input video data by using a variety of the parameters by a combination of conventional coding methods such as motion compensative prediction, orthogonal transformation, quantization and variable length coding. The coded video data is assembled into a coded data by the coded data integrating portion 22, then the coded data is transferred or accumulated. The concept of the present invention will be described as follows:

45 Fig. 2 is a view for explaining the concept of encoding method according to the present invention. The hierarchical encoding method of the present invention uses one lower-layer (lower level) and two upper layers (higher levels). At the lower-layer, a selected area (hatched area) is encoded with a relatively low image-quality. A remarkable time is denoted by  $t$  and a decoded image of the time  $t$  is denoted by  $L(t)$ . At the first upper layer, a whole image is encoded to be of a relatively low image-quality. A decoded image of this layer is denoted by  $H1(t)$ . In this case, predictive coding is made by using the decoded image of the lower-layer  $L(t)$  and the decoded image of the first upper-layer  $H1(t-1)$ . At the second upper layer, only the selected area is predictively encoded to be of a higher image-quality than that at the lower-layer. The decoded image of this layer is denoted by  $H2(t)$ . In this case, predictive coding is made by using decoded image of the lower-layer  $L(t)$  and the decoded image of the second upper-layer  $H2(t-1)$ .

55 Figs. 3 and 4 are illustrative of the concept of decoding method according to the present invention. Fig. 3 shows three-layer decoding processes: decoding only lower-layer data, decoding only the first upper-layer data and decoding all layers data. In this case, decoding the lower-layer data reproduces only an image selected by the coding device to be of a relatively low image-quality, decoding the first upper-layer data reproduces a whole image of a relatively low

image-quality and decoding all coded data reproduces the selected area of a higher image-quality and all other areas of a lower image-quality. On the other hand, Fig. 4 shows a case when all coded signals are decoded after decoding the second upper-layer data instead of the first upper-layer data. In this case, an intermediate layer (the second upper-layer) data is decoded to reproduce a selected image-area only of a higher image-quality.

5 With the decoding device according to the present invention, only a selected image area of a lower image-quality is reproduced from coded data corresponding to the lower-layer while a whole image of a lower image-quality or only a selected area of a higher image-quality is reproduced from coded data corresponding to the upper layer. Namely, any one of two upper layers above a common lower-layer can be selected.

An embodiment of the present invention will be described as follows:

10 Fig. 5 is a block diagram showing a coding device embodying the present invention.

In Fig. 5, an area selecting portion 5 and an area-position-and-shape coding portion 6 are similar in function to those of the prior art shown in Fig. 1. In Fig. 5, a lower-layer coding portion 4 encodes only an area selected by the area selecting portion 5 to be of a lower image-quality, prepares coded data of the lower-layer and generates a decoded image from the coded data. The decoded image is used as a reference image for predictive coding.

15 A first-layer coding portion 1 encodes a whole image to be of a lower image-quality, prepares coded data of the first-layer and generates a decoded image from said coded data. The decoded image is used as a reference image for predictive coding.

A second-layer coding portion 2 encodes only a selected area image to be of a higher image-quality, prepares coded data of the second-layer and generates a decoded image from said coded data. The decoded image is used as a reference image for predictive coding.

20 A coded data integrating portion 3 integrates selected-area position-and-shape codes, lower-layer coded data, first upper-layer coded data and second upper-layer coded data.

There are several kinds of encoding methods which are applicable in the lower-layer coding portion 4, the first-layer coding portion 1 and the second-layer coding portion 2, which will be described as follows: Figs. 6 and 7 are illustrative of the technique of controlling the lower-layer image-quality and the upper-layer image quality depending upon quantization steps.

Fig. 6(a) illustrates how to encode the lower-layer image data. A hatched area represents a selected area. At the lower-layer, a selected area of a first frame is intraframely encoded and selected areas of other remaining frames are predictively encoded by motion-compensative prediction method. As a reference image for the motion compensative prediction is used a selected area of a frame of the lower-layer, which has been already encoded and decoded. Although only forward prediction is shown in Fig. 6(a), it may be applied in combination with backward prediction. Because the quantization step at the lower-layer is controlled to be larger than that at the second upper layer, only a selected area of an input image is encoded to be of a lower image-quality (with a low signal-to-noise ratio). Consequently, the lower-layer image-data is encoded by using a smaller amount of codes.

35 Fig. 6(b) illustrates how to encode the first upper-layer image data. At this layer, a whole image is encoded. For example, a whole image is encoded by predictive coding based on a decoded image of the lower-layer and a decoded image of the first upper-layer. In this case, a whole image of the first frame is encoded by prediction from the lower-layer decoded image (areas other than selected one are intraframely encoded in practice because the motion-compensative prediction method can not be applied in practice). Other frames can be encoded by using the predictive coding in combination with the motion compensative prediction.

40 Such a variation is also applicable, which does not encode a selected area and encodes only other areas by the predictive coding method as shown in Fig. 6. The encoding process is performed for areas other than the selected one.

Fig. 6(c) illustrates how to encode the second upper-layer image data. Only a selected image area is encoded at a relatively small quantization step. In this case, objective data to be encoded is differential data obtained between original image data and image data predicted from the lower-layer image data. Although only prediction from the lower-layer image data is shown in Fig. 6(c), it may be used in combination with the prediction from a decoded frame of the second upper-layer.

Fig. 8 is a view for explaining a method of controlling the lower-layer image quality and the upper-layer image quality by using differential time resolution values.

50 Fig. 8(a) illustrates how to encode the lower-layer image data. A hatched area represents a selected area. At the lower-layer, a selected area of a first frame is intraframely encoded and selected areas of other remaining frames are predictively encoded by motion-compensative prediction. As a reference image for the motion compensative prediction is used a selected area of a frame of the lower-layer, which has been already encoded and decoded. Although only forward prediction is shown in Fig. 8(a), it may be applied in combination with backward prediction. The frame-rate of the lower-layer is so decreased that time resolution is adjusted to be lower than that at the second upper layer. It is also possible to encode frames at a smaller quantization interval so that each frame may have a larger signal-to-noise ratio.

Fig. 8(b) illustrates how to encode the first upper-layer image data. A whole image is encoded with a low time-



image-resolution. In this case, it is possible to apply the coding method similar to that shown in Fig. 6(b) or Fig. 7.

Fig. 8(c) illustrates how to encode the second upper-layer image data. Only a selected area is encoded with a higher time resolution. In this case, a frame whose selected area was encoded at the lower-layer is encoded by prediction from the lower-layer decoded image, whereas all other frames are encoded by motion compensative prediction from the already decoded frames of the upper-layer. In case of using prediction from the lower-layer decoded frame, it is possible not to encode any second upper-layer image data, adopting the lower-layer decoded image as a second upper-layer decoded image.

Fig. 9 is a view for explaining a method of the lower-layer image quality and the upper-layer image quality by using differential spatial resolution values.

Fig. 9(a) illustrates how to encode the lower-layer image data. An original image is converted into an image of a lower spatial resolution through a low-pass filter or thinning operation. Only hatched selected areas are encoded. At the lower-layer, a selected area of a first frame is intraframely encoded and selected areas of other remaining frames are predictively encoded by motion-compensative prediction.

Fig. 9(b) illustrates how to encode the first upper-layer image data. An original image is converted into an image of a lower spatial resolution and a whole image is encoded with a higher time-resolution. In this case, it is possible to apply the coding method similar to that shown in Fig. 6(b) or Fig. 7.

Fig. 9(c) illustrates how to encode the second upper-layer image data. Only a selected area is encoded with a higher spatial resolution. In this case, a decoded image of the lower-layer is converted into an image having the same spatial resolution as an original image and selected areas are encoded by prediction from the lower-layer decoded image and by motion compensative prediction from the already decoded frame of the second upper-layer.

The above-described image-quality controlling methods using gradation resolution (by Signal-Noise-Ratio), time resolution and spatial resolution may be also applied in combination with one another.

For example, it is possible to adjust the lower-layer image-quality and the upper-layer image quality by using a combination of a differential spatial resolution and a differential time resolution or by using a combination of a differential quantization step and a differential time resolution.

A selected area in a whole image is thus encoded to have a higher image-quality than that of other areas. At the same time, the coded data is given respective one of three hierarchical layers (two upper layers and one lower-layer).

Decoding devices which are preferred embodiments of the present invention will be described as follows:

Fig. 10 is illustrative of a first embodiment of a decoding device according to the present invention, which is intended to decode only lower-layer image data.

In Fig. 10, a coded data separating portion 7 is intended to separate coded data into area-position-and-shape coded data and lower-layer coded image data and selectively extract desired coded data.

An area-position-and-shape decoding portion 9 is intended to decode a position code and a shape code of a selected area.

An lower-layer decoding portion 8 is intended to decode lower-layer coded data of a selected area and to prepare a lower-quality decoded image of the selected area only.

Accordingly, each image outputted from this decoding device relates to image information of a selected area only, which is indicated as a window on a display screen. The lower-layer decoding portion 8 may be provided with a spatial resolution converter to enlarge the select area to full screen size and indicate it on the display screen.

The shown embodiment may obtain decoded images of a lower quality because of decoding only lower-layer data of a selected area, but it may be simple in hardware construction omitting an upper-layer decoding portion and may easily decode the coded image by processing an decreased amount of the coded data.

Fig. 11 is illustrative of a second embodiment of a decoding device according to the present invention, wherein an area-position-and-shape decoding portion 9 and an lower-layer decoding portion 8 are similar in function to those of the first embodiment.

In Fig. 11, a coded data separating portion 10 separately extracts, from coded data, area-position-and-shape coded data, lower-layer coded data of an area and first upper-layer coded data.

A first upper-layer decoding portion 11 decodes a first upper-layer coded data, whereby a whole image is decoded to be of a lower quality by using area-position-and-shape data, the lower-layer decoded image and the second upper-layer decoded image. A first upper-layer decoded image is thus prepared.

Although the shown embodiment uses the first upper-layer coded data, it may also use the second upper-layer instead of the first upper-layer. In this case, the coded data separating portion 10 separately extracts, from coded data, area-position-and-shape coded data, lower-layer coded data of an area and second upper-layer coded data. The first upper-layer decoding portion 11 is replaced by a second upper-layer decoding portion which decodes a second upper-layer coded data by using the area-position-and-shape data, the lower-layer decoded image and the second upper-layer decoded image and only the selected image is decoded to be of a higher quality. A second upper-layer decoded image thus prepared may be displayed as a window on a display screen or be enlarged to full-screen size and then displayed thereon.

Fig. 12 is illustrative of a third embodiment of a decoding device according to the present invention, wherein an area-position-and-shape decoding portion 9 and an lower-layer decoding portion 8 are similar in function to those shown in Fig. 2.

In Fig. 12, a coded data separating portion 10 separately extracts, from coded data, area-position-and-shape data, lower-layer coded data, first upper-layer coded data and second upper-layer coded data.

A first upper-layer decoding portion 11 decodes a first upper-layer coded data, while a second upper-layer decoding portion 13 decodes a second upper-layer coded data.

An upper-layer synthesizing portion 14 combines a second upper-layer decoded image with a first upper-layer decoded image to produce a synthesized image by using information on the area position and shape. The synthesis of a selected area is conducted by using the second upper-layer decoded image, while the synthesis of other areas is conducted by using the first upper-layer decoded image. Therefore, an image outputted from the decoding device relates to a whole image wherein a selected area is particularly decoded to be of a higher quality as to parameters such as SNR (Signal-to-Noise Ratio), time resolution and spatial resolution. An area selected by the coding device is thus decoded to have a higher quality than that of other areas.

Fig. 13 is a block diagram showing a conventional device as a reference to the present invention. A first video-sequence is assumed to be a background video and a second video-sequence is assumed to be a part video. An alpha plane is weight data used when synthesizing a part image with a background image in a moving picture (video) sequence. Fig. 14 shows an exemplified image made of pixels weighted with values of 1 to 0. The alpha-plane data is assumed to be 1 within a part and 0 out of a part. The alpha data may have a value of 0 to 1 in a boundary portion between a part and the outside thereof in order to indicate a mixed state of pixel values in the boundary portion and transparency of transparent substance such as glass.

Referring to Fig. 13 showing the conventional method, a first video-coding portion 101 encodes the first video-sequence and a second video-coding portion 102 encodes the second video-sequence according to an international standard video-coding system, e.g., MPEG or H.261. An alpha-plane coding portion 112 encodes an alpha-plane. In the above-mentioned paper, this portion uses the techniques of vector quantization and Haar transformation. A coded-data integrating portion (not shown) integrates coded data received from the coding portions and accumulates or transmits the integrated coded data.

In the decoding device of the conventional method, a coded-data disassembling portion (not shown) disassembles coded data into the coded data of the first video-sequence, the coded data of the second video-sequence and the coded data of the alpha-plane, which are then decoded respectively by a first video-decoding portion 105, a second video-decoding portion 106 and an alpha-plane decoding portion 113. Two decoded sequences are synthesized according to weighted mean values by a first weighting portion 108, a second weighting portion 109 and adder 111. The first video-sequence and the second video-sequence are combined according to the following equation:

$$f(x,y,t) = (1 - \alpha(x,y,t))f_1(x,y,t) + \alpha(x,y,t)f_2(x,y,t)$$

In the equation, (x,y) represents coordinate data of an intraframe pixel position, t denotes a frame time,  $f_1(x,y,t)$  represents a pixel value of the first video sequence,  $f_2(x,y,t)$  represents a pixel value of the second video sequence,  $f(x,y,t)$  represents a pixel value of the synthesized video sequence and  $\alpha(x,y,t)$  represents alpha-plane data. Namely, the first weighting portion 108 uses  $1-\alpha(x,y,t)$  as a weight while the second weighting portion 109 uses  $\alpha(x,y,t)$  as a weight.

As mentioned above, the conventional method produces a large number of coded data because it must encode alpha-plane data.

To avoid this problem, saving the information amount by binarizing alpha-plane data may be considered, but it is accompanied by such a visual defect that tooth-like line appears at the boundary between a part image and a background as the result of discontinuous change of pixel values thereabout.

Fig. 15 is a block diagram showing a coding device and decoding device embodying the present invention. In Fig. 15, a first video-coding portion 101, a second video-coding portion 102, a first video-decoding portion 105, a second video-decoding portion 106, a first weighting portion 108, a second weighting portion 109 and adder 111 are similar in function to those of the conventional device and, therefore, will not be further explained. In Fig. 15, an area-information coding portion 103 encodes an area information representing a shape of a part image of a second video-sequence, an area-information decoding portion 107 decodes the coded area-information and an alpha-plane generating portion 110 prepares an alpha plane by using coded area information.

The operations of the coding device and the decoding device are as follows:

The coding device encodes the first video-sequence and the second video-sequence by the first video-coding portion 101 and the second video-coding portion 102 respectively and encodes an area information by the area-information coding portion 103 according to a method to be described later. These coded data are integrated for further transmission or accumulation by a coded-data integrating portion (not shown). On the other hand, the decoding device

separates the transmitted or accumulated coded data by the coded-data separating portion (not shown) and decodes the separated coded data by the first video-decoding portion 105, the second video-decoding portion 106 and the area-information decoding portion 107 respectively. The alpha-plane generating portion 110 prepares an alpha-plane from the decoded area-information by a method to be described later. The first weighting portion 108, the second weighting portion 109 and the adder 111 may synthesize two decoded sequences by using weighted mean values according to the prepared alpha-plane.

Fig. 16 shows an example of area information that corresponds to an area information of a part video-image of Fig. 14. The area information is binarized using a threshold of 0.2. Area information may be thus obtained by binarizing the alpha plane or it may be determined by edge detection or other area-dividing method. In case of selecting an area by a method described in a reference material "Real-time face-image following-up method" (The Institute of Image Electronics Engineers of Japan, Previewing Report of Society Meeting, 93-04-04, pp. 13-16, 1993), information to be used may be a rectangle. In this instance, area information is binarized, e.g., as 1 within a body and as 0 outside the body.

A practical technique of encoding area information, which will not be explained in detail, may be run-length coding and chain coding since the area information is binarized data. If area data represents a rectangle, it requires encoding only coordinate data of its start point, length and width.

Various kinds of methods may be applied for preparing an alpha-plane depending upon what shape area-information represents.

In case of an area having a rectangular shape, an alpha-plane can be prepared by independently using the following linear weight-values in horizontal direction and vertical direction of the rectangle area.

$$W_{x,ax}(x) = \begin{cases} \sin^2[(x+1/2)\pi/L] & (0 < x \leq L/2) \\ 1 & (L/2 < x \leq N-L/2) \\ \sin^2[((x-M)+1/2)\pi/L] & (N-L/2 < x \leq N) \end{cases} \quad (1)$$

In the equation (1), M is equal to "aN" and L is equal to "N-M" ("a" is a real value of 0 to 1). "N" represents a size of a rectangle area and "a" represents flatness of weight to be applied to said area. Fig. 17 shows an example of a linear function of weight. An alpha-plane corresponding to a rectangle is expressed as follows:

$$\alpha(x,y) = W_{Nx,ax}(x)W_{Ny,ay}(y) \quad (2)$$

In the equation (2), a size of the rectangle is expressed by the number of pixels "Nx" in horizontal direction and pixels "Ny" in vertical direction and the flatness of weight is expressed by "ax" in horizontal direction and by "ay" in vertical direction.

Various combinations of linear weight functions other than the equation (1) may be also considered to use.

Three different methods for preparing an alpha-plane for an area of any desired shape, by way of example, will be described as follows:

The first method is to determine a circumscribed rectangle of the area and then to apply the above-mentioned linear weight functions to the circumscribed rectangle in horizontal direction and vertical direction respectively.

The second method is to sequentially determine weight values to be applied to an area from its circumference as shown in Fig. 18. For example, pixels at the circumference of the area are determined and are given a weight of 0.2 respectively. Next, pixels at the circumference of a still-not-weighted part within the area are determined and are given a weight of 0.5 respectively. These operations are repeated until circumferential pixels are weighted at 1. Preparation of an alpha-plane is finished by applying a weight of 1.0 to a last not-weighted area. The obtained alpha-plane has a value of 1.0 at its center portion and a value of 0.2 at its circumferential portion. In case of determining weight values from circumference of an area, it is possible to use a linear weight function of the equation (1) or other linearly varying values. In sequentially changing a weight-value, a circumferential pixel thickness may be a single pixel or more.

The third method is to apply a weight of 0 to the outside of an area and a weight of 1 to the inside of the area and then to process a thus binarized image through a low-pass filter to gradate the area boundary portion. Various kinds of alpha-planes can be prepared by changing a size and coefficient of a filter and the number of filtering operations.

As is apparent from the foregoing, the first embodiment can attain an increased efficiency of data coding in comparison with the conventional device because the alpha-plane is prepared by the decoding side, thereby eliminating the need of encoding weight-information. In addition, the decoding device prepares an alpha-plane from the decoded area information and synthesizes video-sequences by using the prepared alpha-plane, thereby preventing the occurrence of such a visual defect that a toothed line appears at the boundary of a part image in the background.

Another embodiment of the present invention will be described as follows:

Fig. 19 is a block diagram showing a coding device and a decoding device of the embodiment. In Fig. 19, a first weighting portion 108, a second weighting portion 109 and adder 111 are similar to those of the conventional device and is omitted from the further explanation. An area-information coding portion 103, an area-information decoding portion 107, alpha-plane generating portions 121 and 122 are similar in function to those of the first embodiment and, therefore, will not be further explained.

This embodiment is featured in that the coding side is also provided with an alpha-plane generating portion 120 for encoding an image with weight values for synthesizing a plurality of video sequences. Coded data becomes smaller than the original data because weight data is not more than 1, and, therefore, an amount of coded data can be reduced.

In Fig. 19, a first video-coding portion 122 and a second video-coding portion 123 encode images of video-sequences by weighting on the basis of respective alpha-planes prepared by the coding side. A first video-decoding portion 124 and a second video-decoding portion 125 decode the coded images of the video-sequences by inversely weighting on the basis of respective alpha-planes prepared by the decoding side.

The first video-coding portion 122 or the second video coding portion 123 may be constructed for transform-coding as shown, for example, in Fig. 20. A video-sequence to be processed is the first video-sequence or the second video-sequence. A transforming portion 131 transforms an input image by block by using a transforming method such as DCT (Discrete Cosine Transform), discrete Fourier transform and Weiblet transform.

In Fig. 20, a first weighting portion 132 weights a transform-coefficient with an alpha-plane value. The value used for weighting may be a representative of an alpha-plane within an image block to be processed. For example, a mean value of the alpha-plane within the block is used. Transform-coefficients of the first video sequence and the second video sequence are expressed by  $g1(u,v)$  and  $g2(u,v)$  respectively and they are weighted according to the following equations:

$$gw1(u,v) = (1 - \bar{\alpha})g1(u,v) \quad (3)$$

$$gw2(u,v) = \bar{\alpha}g2(u,v)$$

In the equation (3),  $gw1(u,v)$  and  $gw2(u,v)$  denote weighted transform coefficients,  $u$  and  $v$  denote horizontal and vertical frequencies,  $\bar{\alpha}$  is a representative of an alpha-plane in a block.

In Fig. 20, a quantizing portion 133 quantizes transform coefficients, a variable-length coding portion 134 encodes the quantized transform coefficients with variable-length codes to generate coded data.

A first video-decoding portion 124 or a second video-decoding portion 125, which corresponds to the video-coding portion of Fig. 19, may be constructed as shown in Fig. 21. A variable-length decoding portion 141 decodes coded data, an inversely quantizing portion 142 inversely quantizes decoded data and an inversely weighting portion 143 performs reverse operation on transform coefficients to reverse the equation (2). Namely, the transform coefficients are weighted with weight values that reverse those applied at the coding side according to the following equation:

$$\hat{g}1(u,v) = \hat{g}w1(u,v)/(1 - \bar{\alpha}) \quad (4)$$

$$\hat{g}2(u,v) = \hat{g}w2(u,v)/\bar{\alpha}$$

In the equation (4),  $\hat{\phantom{x}}$  (Hat) indicates decoded data, e.g.,  $gw1$  with a hat is a weighted decoded transform coefficient of the first video-sequence.

Besides above-mentioned weighting method, there is such an applicable method that does not weight a direct current component of a transform coefficient and weights other transform coefficients according to the equation (2). In this case, weighting is substantially effected by correcting a quantizing-step width adopted by the international standard MPEG or H.261 by using a representative value of the alpha-plane within the block.

Namely, a quantizing-step width changing portion 38 is provided as shown in Fig. 21, whereby a quantizing-step

width determined by a quantizing-step width determining portion (not shown) is changed by using alpha-plane data. In practice, a representative  $\bar{\alpha}$  (e.g., a mean value) of the alpha-plane within a block is first determined, then the quantizing-step width is divided by a value  $(1 - \bar{\alpha})$  for the first video sequence or by a value  $\bar{\alpha}$  for the second video-sequence to obtain a new quantizing-step width.

5 There are two inversely weighting methods which correspond to the above-mentioned weighting method. The first method relates to a case when a quantizing-step width (without being changed by the quantizing-step width changing portion 138) is encoded by the coding device shown in Fig. 22. In this case, the decoding device of Fig. 23, which is provided with a quantizing-step width changing portion 148 corresponding to that of the coding side of Fig. 22, decodes the quantizing-step width by a quantizing-step width decoding portion (not shown) and then changes the decoded  
10 quantizing-step width by the quantizing-step width changing portion 148 according to the alpha-plane data. The second method relates to a case when a quantizing-step width after being changed by the quantizing-step width changing portion 138 is encoded by the coding device shown in Fig. 22. In this case, the decoding device directly uses the decoded quantizing-step width and inversely quantizes it. This eliminates the use of a special inversely weighting device (i.e., the quantizing-step width changing portion 108 of Fig. 23). The second method, however, is considered  
15 to have a decreased flexibility of weighting as compared with the first method.

The above-described second embodiment uses the transform coding. Therefore, a motion compensative coding portion featuring the MPEG system or the H.261 system was omitted from Figs. 20 to 23. This method, however, can be applied for coding system using the motion compensative prediction. In this instance, a prediction error for motion compensative prediction is inputted into a transforming portion 131 of Fig. 20.

20 Other weighting methods in the second embodiment are as follows:

Fig. 24 shows an example of the first video-coding portion 122 or the second video-coding portion 123 of the coding device shown in Fig. 19. Namely, the coding portion is provided with a weighting portion 150 which performs weighting operation before video coding by the standard method MPEG or H.261 according to the following equation:

$$25 \quad fw1(x,y) = (1 - \bar{\alpha})f1(x,y) \quad (5)$$

$$30 \quad fw2(x,y) = \bar{\alpha}f2(x,y)$$

In the equation (5),  $fw1(x,y)$  is the first weighted video-sequence,  $fw2(x,y)$  is the second weighted video-sequence and  $\bar{\alpha}$  is a representative of an alpha-plane within a block.

Weighting may be effected according to the following equation:

$$35 \quad fw1(x,y) = (1 - \alpha(x,y))f1(x,y) \quad (6)$$

$$40 \quad fw2(x,y) = \alpha(x,y)f2(x,y)$$

Fig. 25 shows an inversely weighting method of the decoding device, which corresponds to the above-mentioned weighting method. The inversely weighting portion 161 weights the video-sequence with weight reversing that applied by the coding device.

45 When the coding device weighted the video-sequence according to the equation (5), the decoding device may omit the inversely weighting portion 61, the first weighting portion 108 and the second weighting portion 109 for synthesizing sequences, which are shown in Fig. 19. Namely, it is possible to use a coding device and decoding device, which are shown in Fig. 26. A first video-coding portion 122 and a second video-coding portion 123, which are shown in Fig. 26, are constructed as shown in Fig. 24, and use the weighting method of equation (5). In this instance, weight information such as area information and alpha-plane data, which are necessary for synthesizing the video-sequences,  
50 is included in the video coded data itself, the weighting information does not require encoding. Accordingly, sequences decoded by the decoding device can be directly added to each other to generate a synthesized sequence. Encoding only data within an area is rather effective than encoding a whole image if a video-sequence 102 relates to a part image. In this case, it becomes necessary to encode the area information by the coding device and to decode the coded area information by the decoding device.

55 The foregoing description relates to an example of weighting each of plural video-sequences in the second embodiment of the present invention. For example, the first video-sequence is weighted with a value of  $(1 - \bar{\alpha})$  while the second video-sequence is weighted with a value of  $\bar{\alpha}$ .

Although the embodiments have been explained in case of synthesizing one background video-sequence and one part video-sequence, the present invention is not be limited thereto but can be adapted to synthesize plurality of part video-sequences with a background. In this instance, each area information corresponding to each part image is encoded.

5 The background image and part images may be independently encoded or may be hierarchically encoded, considering the background image as an lower-layer and the part images as upper-layers. In the latter case, each upper-layer image can be effectively encoded by predicting its pixel value from that of the lower-layer image.

There has been studied a video coding method that is adapted to synthesize different kinds of video sequences.

Following description shows conventional devices as reference to the present invention.

10 A paper "Image coding using hierarchical representation and multiple templates" appeared in Technical Report of IEICE IE94-159, pp. 99 - 106, 1995, describes such an image synthesizing method that combines a video-sequence being a background video and a part-video-sequence being a foreground video (e.g., a figure image or a fish image cut-out by using the chromakey technique) to produce a new sequence.

15 A paper "Temporal Scalability based on image content" (ISO/IEC JTC1/SC29/WG11 MPEG95/211, (1995)) describes a technique for preparing a new video-sequence by synthesizing a part-video sequence of a high frame rate with a video-sequence of a low frame rate. As shown in Fig. 27, this system is to encode an lower-layer frame at a low frame-rate by prediction coding method and to encode only a selected area (hatched part) of an upper-layer frame at a high frame rate by prediction coding. The upper layer does not encode a frame coded at the lower-layer and uses a copy of the decoded image of the lower-layer. The selected area may be considered to be a remarkable part of image, e.g., a human figure.

20 Fig. 28 is a block diagram showing a conventional method, at the coding side, an input video-sequence is thinned by a first thinning portion 201 and a second thinning portion 202 and the thinned video-sequence with a reduced frame rate is then transferred to an upper-layer coding portion and an lower-layer coding portion respectively. The upper-layer coding portion has a frame rate higher than that of the lower-layer coding portion.

25 The lower-layer coding portion 204 encodes a whole image of each frame in the received video-sequence by using an international standard video-coding method such as MPEG, H.261 and so on. The lower-layer coding portion 204 also prepares decoded frames which are used for prediction coding and, at the same time, are inputted into a synthesizing portion 205.

30 Fig. 29 is a block diagram of a code-amount control portion of a conventional coding portion. In Fig. 29, a coding portion 212 encodes video frames by using a method or a combination of methods such as motion compensative prediction, orthogonal transformation, quantization, variable length coding and so on. A quantization-width (step-size) determining portion 211 determines a quantization-width (step size) to be used in a coding portion 212. A coded-data amount determining portion 213 calculates an accumulated amount of generated coded data. Generally, the quantization width is increased or decreased to prevent increase or decrease of coded data amount.

35 In Fig. 28 the upper-layer coding portion 203 encodes only a selected part of each frame in a received video-sequence on the basis of an area information by using an international standard video-coding method such as MPEG, H.261 and so on. However, frames encoded at the lower-layer coding portion 204 are not encoded by the upper-layer coding portion 203. The area information is information indicating a selected area of, e.g., an image of a human figure in each video frame, which is a binarized image taking 1 in the selected area and 0 outside the selected area. The upper-layer coding portion 203 also prepares decoded selected areas of each frame, which are transferred to the synthesizing portion 205.

40 An area-information coding portion 206 encodes an area information by using 8-directional quantizing codes. The 8-directional quantizing code is a numeric code indicating a direction to a proceeding point as shown in Fig. 30 and it is usually used for representing digital graphics.

45 A synthesizing portion 205 outputs a decoded lower-layer video-frame which has been encoded by lower-layer coding portion and is to be synthesized. When a frame to be synthesized but has not been encoded at the lower-layer coding portion, the synthesizing portion 205 outputs a decoded video-frame that is generated by using two decoded frames, which have been encoded at the lower-layer and stand before and after the lacking lower-layer frame, and one decoded upper-layer frame to be synthesized. The two lower-layer frames stand before and after the upper-layer frame. The synthesized video-frame is inputted into the upper-layer coding portion 203 to be used therein for predictive coding. The image processing in the synthesizing portion 203 is as follows:

50 An interpolating image is first prepared for two lower-layer frames. A decoded image of the lower-layer at time  $t$  is expressed as  $B(x,y,t)$ , where  $x$  and  $y$  are co-ordinates defining the position of a pixel in a space. When the two decoded images of the lower-layer are located at time  $t_1$  and  $t_2$  and the decoded image of the upper-layer is located at  $t_3$  ( $t_1 < t_3 < t_2$ ), the interpolating image  $I(x,y,t_3)$  of time  $t_3$  is calculated according to the following equation (1):

$$I(x,y,t_3) = [(t_2-t_3)B(x,y,t_1) + (t_3-t_1)B(x,y,t_2)]/(t_2-t_1) \quad (1)$$

The decoded image E of the upper layer is then synthesized with the obtained interpolating image I by using synthesizing weight information W(x,y,t) prepared from area information. A synthesized image S is defined according to the following equation:

$$S(x,y,t)=[1-W(x,y,t)]I(x,y,t)+E(x,y,t)W(x,y,t) \quad (2)$$

The area information M(x,y,t) is a binarized image taking 1 in a selected area and 0 outside the selected area. The weight information W(x,y,t) can be obtained by processing the above-mentioned binarized image several times with a low-pass filter. Namely, the weight information W(x,y,t) takes 1 within a selected area, 0 outside the selected area and a value of 0 to 1 at boundary of the selected area.

The coded data prepared by the lower-layer coding portion, the upper-layer coding portion and the area information coding portion is integrated by an integrating portion (not shown) and then is transmitted or accumulated.

In the decoding side of the conventional system, a coded data disassembling portion (not shown) separates coded data into lower-layer coded data, upper-layer coded data and area-information coded data. These coded data are decoded respectively by a lower-layer decoding portion 208, an upper-layer decoding portion 207 and an area information decoding portion 209.

A synthesizing portion 210 of the decoding side is similar in construction to the synthesizing portion 205. It synthesizes an image by using a decoded lower-layer image and a decoded upper-layer image according to the same method as described at the coding side. The synthesized video frame is displayed on a display screen and, at the same time, is inputted into the upper layer decoding portion 207 to be used for prediction thereat.

The above-described decoding device decodes both lower-layer and the upper-layer frames, but a decoding device consisting of an lower-layer decoding portion is also applied, omitting the upper-layer coding portion 204 and the synthesizing portion 210. This simplified decoding device can reproduce a part of coded data.

This embodiment of the present invention is intended to solve a problem that may occur in a synthesizing portion 205 shown in Fig. 28. This embodiment also relates a video-synthesizing device which is capable of synthesizing an image from two lower-layer decoded frames and one upper-layer decoded selected area or areas without occurrence of afterimage-like distortion around the selected area or areas. Fig. 32 is a block diagram showing an image synthesizing device that is an embodiment of the present invention.

In Fig. 32, a first area-extracting portion 221 is to extract an area, which relates to a first area and does not relate to a second area, from a first area information of an lower-layer frame and a second area information of an lower-layer frame. In Fig. 33(a), the first area information is shown by a dotted line (0 within the dotted area and 1 outside the dotted area) and the second area information is shown by a broken line (with similar numeral codes). Consequently, an area to be extracted by the first area extracting portion 221 is a hatched part shown in Fig. 33.

A second area extracting portion 222 of Fig. 32 is intended to extract an area, which relates to the second area and does not relate to the first area, from a first area information of an lower-layer frame and a second area information of an lower-layer frame. Namely, a dotted area shown in Fig. 33(a) is extracted.

In Fig. 32, a controller 223 controls a switch 224 according to an output of the first area extracting portion and the second area extracting portion. Namely, the switch 221 is connected to a second decoded image side when the position of a remarkable pixel relates to only the first area and it is connected to a first decoded image side when the remarkable pixel relates to only the second area. The switch is connected to an output of interpolation-image generating portion 225 when the remarkable pixel does not relate to the first and second areas.

The interpolation-image generating portion 225 calculates an interpolating image between the first decoded lower-layer image and the second decoded lower-layer image according to the equation (1) defined as the above. In Equation (1), the first decoded image is expressed as B(x,y,t1), the second decoded image is expressed as B(x,y,t2) and the interpolating image is expressed as B(x,y,t3). "t1", "t2" and "t3" are time marks of the first decoded image, second decoded image and interpolating image respectively.

Referring to Fig. 33(a), the interpolating image thus generated is featured by that the hatched area is filled with a background image, outside the selected area, of the second decoded frame, a dotted area is filled with a background image, outside the selected area, of the first decoded frame, and other portions are filled with the interpolating image between the first and second decoded frames. The upper-layer decoded image is then overlaid on the above-mentioned portion 226 shown in Fig. 32 to produce a synthesized image shown in Fig. 33(b), which has no after image around the selected (hatched) area and is free from the distortion occurred in the prior art image. The weighted averaging portion 226 combines the interpolating image with the upper-layer decoded image by using weighted means. The weighted averaging method was described before.

In the above-described embodiment, it is also possible to use, instead of the mean-weighting portion 225, pixel values of either the first decoded image B(x,y,t1) or the second decoded image B(x,y,t2), which is temporally nearer to the time mark t3 of the upper-layer image. In this instance, the interpolating image I may be expressed by using

frame number as follows:

$$I(x,y,t_3) = B(x,y,t_1) \text{ in case of } t_3 - t_1 < t_1 - t_2 \text{ or}$$

$$I(x,y,t_3) = B(x,y,t_2) \text{ in all other cases.}$$

In the expressions,  $t_1$ ,  $t_2$  and  $t_3$  denote time marks of the first decoded image, the second decoded image and the upper-layer decoded image.

Another embodiment of the present invention will be described as follows:

This embodiment relates to an image synthesizing device which is based on the first embodiment and is capable of generating a more accurate synthesized image with consideration of motion information of lower-layer decoded images. Fig. 34 is a block diagram showing a device for predicting a motion parameter and modifying area information of two corresponding frames.

In Fig. 34, a motion-parameter estimating portion 231 estimates information about the motion from a first lower-layer decoded image to a second lower-layer decoded image by determining motion parameters, e.g., motion vector per block and a whole image movement (parallel displacement, rotation, enlargement and contraction).

An area-form modifying portion 232 modifies the first decoded image, the second decoded image, the first area information and the second area information according to respective predicted motion parameters based on the temporal positions of the synthesizable frames. For example, a motion vector ( $MV_x, MV_y$ ) from the first decoded image to the second decoded image will be determined as a motion parameter.  $MV_x$  is a horizontal component and  $MV_y$  is a vertical component. A motion vector from the first decoded image to the interpolating image is determined according to the equation:  $(t_3 - t_1)/(t_2 - t_1)(MV_x, MV_y)$ . The first decoded image is then shifted according to the obtained vector. In case of using other motion parameters such as rotation, enlargement and contraction, the image is not only shifted but also be deformed. In Fig. 34, the deformed (modified) data sets "a", "b", "c" and "d", which relate respectively to the first decoded image, the second decoded image, the first area information and the second area information of Fig. 32. These data sets are inputted into the image synthesizing device shown in Fig. 32, which generates a synthesized image. Although the above-described embodiment predicts the motion parameters from two decoded images, it may also use a motion vector of each block of each image, which is usually included in coded data prepared by predictive coding. For example, a mean value of the decoded motion vectors may be applied as a motion vector of a whole image from the first decoded frame to the second decoded frame. It is also possible to determine a frequency distribution of decoded motion vectors and to use a vector of highest frequency as a motion parameter of a whole image from the first decoded frame to the second decoded frame. The above-mentioned processing is performed independently in a horizontal direction and a vertical direction.

Another embodiment of the present invention is as follows:

This embodiment relates to an area-information coding device being capable of effectively encoding an area information. Figs. 35 and 36 are block diagrams of this embodiment whose coding side is shown in Fig. 35 and decoding side is shown in Fig. 36.

In Fig. 35, an area-information approximating portion 241 approximates an area information by using a plurality of geometrical figures. Fig. 37 shows an example of approximation of an area information of a human figure (hatched portion) with two rectangles. One rectangle 1 represents a head of a person and the other rectangle 2 represents a breast portion of the person.

An approximated-area information coding portion 242 encodes the approximated area-information. An area approximated by rectangles as shown in Fig. 37 may be encoded with a fixed code length by encoding coordinates of a left top point of each rectangle and a size of each rectangle with a fixed code length. An area approximated by an ellipse may be encoded at a fixed code length by encoding coordinates of its center, long axis length and short axis length. The approximated area-information and the coded data are sent to a selecting portion 244.

Like the area-information coding portion 206 described in Fig. 28, an area-information coding portion 243 of Fig. 35 encodes an area-information by using an 8-directional quantizing code without approximation. The area information and the coded data are sent to a selecting portion 244.

The selecting portion 244 selects either one of two outputs 242 and 243. With the output 243 being selected, the coded data of the approximated area information with single-bit (e.g., 1) selection information is sent to a coded-data integrating portion (not shown) and approximated area information is sent to a synthesizing portion (not shown). With the output 242 being selected, the coded data of the not-approximated area information with one bit (e.g., 1) of selection information is sent to a coded-data integrating portion (not shown) and the not-approximated area information is sent to a synthesizing portion according to the present invention.

The selecting portion may operate, for example, to select an output which may produce smaller amount of coded data or to select the output 244 when an amount of coded data of the not-approximated information does not exceed



a threshold value and the output 242 when said amount exceeds said threshold value. This makes it possible to reduce the amount of coded data, preventing the area information from being distorted.

The operation of the decoding side of this embodiment is as follows:

In Fig. 36, a selecting portion 251 selects which kind of area-information - approximated or not-approximated - according to the single-bit selecting information contained in the received coded data.

In Fig. 36, an approximated-area-information decoding portion 252 decodes the approximated area information, whereas an area-information decoding portion 253 decodes the not-approximated area information. A switch 254 is controlled by a signal from the selecting portion 251 to select an approximated area-information or not-approximated area-information as an output to a synthesizing portion.

Either approximated area information or not-approximated area information is thus adaptively selected, encoded and decoded. When area information is complicate and may produce a large amount of coded data, the approximated area-information is selected to encode the area-information with a small amount of information.

In the above-mentioned case, the not-approximated area information is encoded by using 8-directional quantizing codes, but it may be more effectively encoded by using a combination of 8-directional quantization with predictive coding. An 8-directional quantizing code takes 8 values from 0 to 7 as shown in Fig. 30, which are differentiated to be from -7 to 7 by predictive coding. A difference, however, may be limited to a range of -3 to 4 by adding 8 if the difference being -4 or less and by subtracting 8 if the difference is more than 4. In decoding, an original 8-directional quantization value can be obtained by first adding the difference to the precedent value and then by subtracting or adding 8 when the result is negative value or exceeds 7. An example is shown below:

8-directional quantization value	1, 6, 2, 1, 3 ..
Difference	5, -4, -1, -2 ..
Converted value	-3, 4, -1, 2, ..
Decoded value	1, 6, 2, 1, 3, ..

For examples a difference between a quantization value 6 and a precedent value is 5 from which 8 is subtracted to obtain a result of -3. In decoding, -3 is added to the precedent value 1 and a value -2 is obtained, which is negative and therefore is increased by adding 8 thereto to finally obtain a decoded value 6. Such predictive coding is effected by utilizing the cyclic feature of the 8-directional coding.

Although this embodiment encodes an approximated area-information of each image independently, it is possible to increase the efficiency of coding using the preceding coding result because video frames usually have a high inter-frame correlation. Namely, only a difference of approximated area information of two successive frames is encoded if the approximated area information is continuously encoded between two frames. When, for example, an area is approximated by a rectangle, a rectangle of a preceding frame is expressed by its left-top position (19, 20) and size (100, 150) and a rectangle of a current frame is expressed by its left-top position (13, 18) and size (100, 152), a differential left-top position (3, 2) and differential size (0, 2) of the current frame is encoded. If a change of an area shape is small, an amount of coded data for the area information can be considerably saved by using entropy coding, e.g., Huffman coding because differences concentrate near to 0 at a small change of an area shape. When a rectangle may not vary in many times, it is effective to encode single-bit information as rectangle change information on a current frame. Namely, single-bit information (e.g., 0) is encoded for current frame whose rectangle does not vary, whereas single-bit information (e.g., 1) and difference information are encoded for frames whose rectangle varies.

Another embodiment of the present invention is as follows:

This embodiment relates to a weight-information generating device for preparing many-valued weight information from an area information. Fig. 38 is a block diagram of this embodiment.

In Fig. 38, a horizontal weight generating portion 261 horizontally scans an area information and detects 1 therein, then calculates a corresponding weight function. In practice, the abscissa  $x_0$  of a left-end point and the horizontal length  $N$  of the area are first determined and then a horizontal weight function is calculated as shown in Fig. 39(a). The weight function may be prepared by combining straight lines or by combining a line with a trigonometric function. An example of the latter case is described below. If  $N > W$  ( $W$  is a width of a trigonometric function), the following weight functions may be applied:

- $\sin[(x+1/2)\pi/(2W)] \times \sin[(x+1/2)\pi/(2W)]$  if  $0 \leq x < W$ ;
- 1 if  $W \leq x < N-W$ ;
- $\sin[(x-N+2W+1/2)\pi/(2W)] \times \sin[(x-N+2W+1/2)\pi/(2W)]$  if  $0 \leq x < W$ ;
- $\sin^2[(x+1/2)\pi/N] \times \sin^2[(x+1/2)\pi/N]$  if  $N \leq 2W$ .

In the above-mentioned case, the left-end point  $x_0$  of the area is set at 0.

In Fig. 38, a vertical weight generating portion 502 vertically scans the area information and detects 1 therein, then

calculates a corresponding vertical weight function. In practice, the ordinate  $y_0$  of a top-end point and the vertical length  $M$  of the area are determined, then a vertical weight function is calculated as shown in Fig. 39(b).

A multiplier 263 multiplies an output 261 by an output 262 at each pixel position to generate a weight information.

The above-mentioned method may obtain a weight information adapted to the form of the area information with a reduced number of operations.

Another embodiment of the present invention is as follows:

This embodiment relates to a method for adaptively switching coding mode from interframe prediction to intraframe prediction and vice versa in predictive coding lower-layer or upper-layer frames. Fig. 40 is a block diagram of this embodiment.

In Fig. 40, a mean-value calculating portion 271 determines a mean of pixel values in an area according to an input original image and an input area-information. The mean value is inputted into a differentiator 273 and a storage 272.

The differentiator 273 determines a difference between a preceding mean value stored in the storage 272 and a current mean value outputted from the mean-value calculating portion 271.

A discriminating portion 274 compares an absolute value of the difference calculated by the differentiator 273 with a predetermined threshold value and outputs a mode-selecting information. With the absolute value of the difference being larger than the threshold, the discriminating portion 273 judges that a scene change occurs in a selected area and generates a mode selecting signal to always conduct the intraframe prediction coding.

Mode selection thus effected by judging a scene change of a selected area is effective to obtain high-quality coded images even when, for example, a person appears from behind the cover or any matter is turn over. The shown embodiment can be applied for system for coding a selected area separately from other areas in encoding lower-layer frames. In this case, area information is inputted into the lower-layer coding portion. This embodiment can be also applied for coding only a selected area of the upper-layer frame.

Another embodiment of the present invention is as follows:

This embodiment relates to a method for controlling an amount of data in case of encoding a separate area separately from other areas of each lower-layer frame. Fig. 41 is a block diagram of this embodiment.

In Fig. 41, a coding portion 283 separates a selected area from other areas and encodes it. An area discriminating portion 281 receives an area information and discriminates whether the encodable area is within or outside the selected area. A coded-data-amount estimating portion 285 estimates an amount of coded data in each area on the basis of the above-mentioned discrimination result. A distributing ratio calculating portion 284 determines distributing ratios of a target amount of codes per frame, which will be allocated to areas. The method for determining distributing ratios will be described later. A quantizing width calculating portion determines a quantizing step-size according to the target amount of coded data. The method for determining quantizing step-size is the same as the conventional method.

The method for determining a code distributing ratio by the target code-allocation calculating portion is as follows:

A target code-amount  $B_i$  of a frame is calculated according to the following equation:

$$B_i = (\text{The number of usable bits} - \text{The number of bits used for coding preceding frames}) / \text{The number of remaining frames}$$

This target number  $B_i$  of bits is distributes at a specified ratio to pixels within a selected area and pixels outside the selected area. The ratio is determined by using an adequate fixed ratio  $R_0$  and a preceding frame complexity ratio  $R_p$ . The complexity ratio  $R_p$  of the preceding frame is calculated by the following equation:

$$R_p = (\text{gen\_bitF} * \text{avg\_qF}) / (\text{gen\_bitF} * \text{avg\_qF} + \text{gen\_bitB} * \text{avg\_qB})$$

where  $\text{gen\_bitF}$  = The number of bits for coding pixels in a selected area of a preceding frame,  $\text{gen\_bitB}$  = The number of bits for coding pixels outside the selected area of a preceding frame,  $\text{avg\_qF}$  = An average quantization step-size in the selected area of a preceding frame and  $\text{avg\_qB}$  = An average quantization step-size outside the selected area of a preceding frame. To encode a selected area at a high image quality, it is desirable to adjust a quantizing step size to keep an average quantizing step-size in the selected area somewhat smaller than that outside the selected area and at the same time to follow up the change of an image in a sequence of moving pictures. Generally, distribution at a fixed ratio  $R_0$  is adapted to maintain a substantially constant relation of quantization step-size between pixels in the selected area and pixels outside the selected area, while distribution at a complexity ratio  $R_p$  of a preceding frame is

adapted to following up the change of an image in a sequence of moving pictures. Accordingly, the present invention is intended to use a combination of advantages of both methods by making a target-bit-amount distributing ratio be an average of the fixed ratio RO and the preceding frame complexity ratio Rp. Namely, the distribution ratio Ra is determined as follows:  $Ra = (RO + Rp)/2$

In Fig. 42, there are two exemplified curves plotted by dotted lines, which represent the fixed ratio RO and the preceding frame complexity ratio Rp in a selected area for a whole video sequence. In this example, a solid-line curve of Fig. 42 relates to the obtainable ratio Ra for distributing a target coded-data-amount, which does not so far part from the curve of fixed ratio and reflects, to a certain extent, a change of an image in a video sequence. At a fixed ratio (1-RO) and preceding frame complexity ratio (1-Rp) for the outside of the selected area, an average ratio, which is a target-bit-amount distributing ratio (1-Ra) for pixels outside the selected area, takes a solid-line-plotted curve shown in Fig. 43. A total of two target-bit-amount distributing ratios for pixels in and out of a selected area takes 1.

The quantization step-size can be thus adaptively controlled. A bit rate of a whole video sequence, however, may some time exceed a predetermined value because the number of bits used exceeds the target value Bi in some frames. In this case, the following method may be applied.

As described above, the target-bit-amount distributing ratio Ra for coding pixels in a selected area is a mean value of the fixed ratio RO and the preceding complexity ratio Rp, whereas the target-bit-amount distributing ratio Rm for coding pixels outside the selected area is a minimal value Rm of the fixed ratio (1-RO) and preceding frame complexity ratio (1-Rp) for coding pixels outside the selected area. In this case, the target-bit-amount distributing ratio (1-Ra) for coding pixels outside the selected area may vary, for example, as shown by a solid line in Fig. 44. As  $Ra + Rm \leq 1$ , the target number of bits can be reduced for a frame or frames wherein excess bits may occur. In other words, the bit rate of a whole video sequence may be kept within the predetermined limit by reducing the target bit-amount of a background area of a frame or frames.

With the video coding and decoding devices according to the present invention, it is possible to encode a selected area of an image to be of a higher quality than that of other areas.

It is possible to decode only a selected area with a lower image quality if only lower-layer coded data is decoded.

In decoding upper-layer coded data, it is possible to select which the first upper-layer or the second upper-layer is decoded. A whole image is decoded to be of a lower image-quality if the first layer is selected, whereas only a selected area is decoded to be of a high image-quality if the second upper-layer is selected.

In decoding all coded data, an image can be decoded in such a way that a selected area of the image may have a higher image quality than that of all other areas thereof.

Although the above-described preferred embodiments of the present invention presumed that the decoding device receives all coded data, but it may be also adapted to such a case that, in a video communication system, a decoding terminal requests a coding side to send a limited data, e.g., coded data on an area position and shape, coded data of the lower-layer and coded data of the first layer to communicate over a transmission line of a narrow bandwidth. Namely, the present invention realizes such data communication that transmits only the lower-layer data over a transmission line of a very narrow bandwidth or selectively transmits any one of two kinds of upper-layer data over a line of some wider bandwidth or transmits all kinds of data over a line of further wider bandwidth.

With the video-coding device according to the present invention, it is possible to reduce an amount of coded data because weighted mean information is prepared from binarized information inputting a plurality of part video-sequences onto a background video-sequence by using the weighted mean values. Because the weighted mean data prepared from the binarized information gets a value of 0 to 1, a boundary between the part images and the background images can be smoothly synthesized without occurrence of any visual defect.

In weighting still-not-coded data using weight values to be used for synthesizing video-sequences, the amount of coded data can be reduced or the quality of decoded image can be improved at the same amount of the coded data as compared with the prior art devices.

The video-coding device according to the present invention is intended to:

(1) synthesize a not-coded lower-layer frame from preceding and proceeding lower-layer frames by weighted averaging two lower-layer frames existing temporally before and after the synthesizable frame for an overlapped portion of a first part area with a second parts area or an area not belonging to the first part area and the second part area, by using an lower-layer frame existing temporally after the synthesizable frame for a part of only the first part area and by using an lower-layer frame existing temporally before the synthesizable frame for a part of only the second part area, thereby obtaining a synthesized image of a high quality with no distortion even when an object moves;

(2) synthesize the lower-layer frame (1) by using an lower-layer frames existing temporally near to the synthesizable frame for an overlapped portion of a first part area with a second parts area or an area not belonging to the first part area and the second part area or by using only a first lower-layer frame or only a second lower-layer frame, thereby obtaining a synthesized image of a high quality with no double vision of the synthesized background image

even when the background image moves;

(3) synthesize the lower-layer frame (1) by modifying (deforming) the first lower-layer frame, the second lower-layer frame, the first part area and the second part area by motion compensation of motion parameters based on the temporal position of the synthesizable lower-layer frame, thereby obtaining a synthesized image of a high quality to follow the movement of a background image of the lower-layer frames;

(4) synthesize the lower-layer frame (3) by using motion vector information obtained by motion compensative prediction coding, thereby obtaining a motion parameter with reduced amount of processing than the case of newly predicting a motion parameter;

(5) adaptively selecting either approximating the area information by a plurality of geometrical figures or encoding without approximation, thereby effectively encoding and decoding area information;

(6) convert area information (5) into eight-directional quantized data, determine a difference between the eight-directional quantized data and encode and decode the difference data by variable-length coding, thereby more efficiently conducting reversibly coding and decoding area information;

(7) further efficiently encode and decode approximated area information (5) by determining interframe difference of geometrical figure information, encode and decode by variable-length coding method, adding information indicating no change of area-information without encoding other area information when the difference data being all 0;

(8) horizontally scan area information to detect a length of each line therein and determine a horizontal weight function; vertically scan the area information to detect a length of each line thereof and determine a vertical weight function; generate many-valued weight information, thereby efficiently generate weight information by a weight-information generating device when synthesizing an upper-layer part-image with an lower-layer frame by weighted averaging method;

(9) encode and decode video frames by using area information indicating a shape of matter or a shape of a part, determines a mean value of pixels in an area from input image and corresponding thereto area information, calculate a difference between average values of a preceding frame and a current frame, compare the difference with a specified value and select the intraframe coding when the difference exceeds the specified value, thereby making it possible to correctly change over the coding mode from the predictive (interframe) coding to the intraframe coding when a scene change occurs and assuring a high quality of coding and decoding images;

(10) separate a video-sequence into background image areas and a plurality of foreground part-images and separately encode each separated background area and each part-image area by determining whether coded data and codable blocks exist in or out of a part area, by separately calculating the coded data amount in the part image area and the coded data amount in the background image area and by determining target-bit-amount distribution ratios for the part-image area and the background-image area, thereby assuring correct distribution of the target number of bits to obtain a high quality of coded images.

## Claims

1. A video coding device capable of giving a hierarchical structure to coded data, comprising:

an lower-layer coding means (4);  
two upper-layer coding means (1, 2);  
an area-selecting means (5) for selecting a specified area of each frame;  
an area-position-and-shape coding means (6) for coding a position and a shape of a selected area of each frame;  
an lower-layer coding means (4) for coding a pixel value of a selected area only to be of a relatively low image-quality;  
a first upper-layer coding means (1) for predictively coding a pixel value of a whole image of each frame to be of a relatively low image-quality by using an already decoded pixel value of an lower-layer coded data and an already decoded pixel value of the first upper-layer coded data;  
a second upper-layer coding means (2) for predictively coding a pixel value of a selected area of each frame to be of a relatively high image quality by using an already decoded pixel value of an lower-layer coded data and an already decoded pixel value of the first upper-layer coded data; and  
a coded data integrating means (3) for integrating coded data obtained by the above-mentioned coding means (1, 2, 4, 6) so as to giving a hierarchical structure to the coded data.

2. A video coding device as defined in claim 1, characterized in that the first upper-layer coding means (1) does not encode a pixel value of a selected area and encodes a pixel value of an area other than the selected area by using already decoded pixel values of an lower-layer coded data and a first upper-layer coded data.

3. A video decoding device for decoding a video-image from data encoded by the video-coding device according to claim 1 or 2, comprising:

a coded data separating means (7) for separately extracting area position and shape codes and a lower-layer code from the coded data;  
 an area-position-and-shape decoding means (8) for decoding the position code and the shape code; and  
 an lower-layer decoding means (9) for decoding the lower-layer code,

characterized in that it decodes a selected area to be of a relatively low image-quality.

4. A video decoding device for decoding a video-image from data encoded by the video-coding device according to claim 1 or 2, comprising:

a coded data separating means (10) for separately extracting area position and shape codes, a first upper-layer code and a lower-layer code from the coded data;  
 an area-position-and-shape decoding means (9) for decoding the position code and the shape code;  
 an lower-layer decoding means (8) for decoding the lower-layer code; and  
 a first upper-layer decoding means (11) for decoding the first upper-layer code,

characterized in that it decodes a whole area of video-image to be of a relatively low image-quality.

5. A video decoding device for simply decoding a video-image from data encoded by the video-coding device according to claim 1 or 2, comprising:

a coded data separating means (10) for separately extracting area position and shape codes, a second upper-layer code and an lower-layer code from the coded data;  
 an area-position-and-shape decoding means (9) for decoding the position code and the shape code;  
 an lower-layer decoding means (8) for decoding the lower-layer code; and  
 a second upper layer decoding means (13) for decoding the second upper-layer code,

characterized in that it decodes a selected area to be of a high image-quality.

6. A video decoding device for decoding a video-image from data encoded by the video-coding device according to claim 1 or 2, comprising:

a coded data separating means (10) for separating the coded data into area position and shape codes, a first upper-layer code, a second upper-layer code and an lower-layer code;  
 an area-position-and-shape decoding means (9) for decoding the position code and the shape code;  
 an lower-layer decoding means (8) for decoding the lower-layer code;  
 a first upper-layer decoding means (11) for decoding the first upper-layer code; and  
 a second upper-layer decoding means (13) for decoding the second upper-layer code,

characterized in that it decodes a selected area to be of a relatively high image-quality and decodes other areas to be of a relatively low-image quality.

7. A video coding device for use in a system for encoding and decoding a background video-sequence for forming a background video and a plurality of part-video-sequences for forming a foreground part-video to combine each part-video-sequence with the background video-sequence by using mean weight values by a decoding side, which has a coding portion (103) which encodes area-position-and-shape information of each part-video-sequence

8. A video coding device as defined in claim 7, characterized in that the weight values for weighted-mean synthesizing are prepared from data showing area-position-and-shape information for a plurality of part-video-sequences and weights each video-sequence and then encoded.

9. A video coding device as defined in claim 8, characterized in that it is provided with a coding portion (101, 102, 122, 123) for encoding an image of the video by block, a portion (110, 121, 120) for obtaining a representative weight-value for each coding block and a portion (108, 109) for weighting each block with the representative weight-value;

10. A video coding device as defined in claim 8, characterized in that it is provided with a portion (122, 123, 131 to 134) for transforming and coding, a portion (120) for obtaining a representative weight-value by each transformed block and a portion (132) for weighting each transformed block with the representative weight-value.
- 5 11. A video decoding device for decoding coded data generated by the video coding device defined in claim 7, which is capable of decoding area-position-and-shape information of a plurality of part-video-sequences, preparing weight values for synthesizing with weighted mean values from the decoded area-position-and-shape information, combining each part-video-sequence with a background video-sequence by using the weighted mean values.
- 10 12. A video decoding device for decoding coded data generated by the video coding device defined in claim 8, which is capable of decoding area-position-and-shape information of a plurality of part-video-sequences, preparing weight values for synthesizing with weighted mean values from the decoded area-position-and-shape information and weighting each part-video-sequence with weight values being reverse to those applied at the coding device.
- 15 13. A video decoding device for decoding the coded data generated by the video coding device defined in claim 9, which is provided with a decoding portion (105, 106, 124, 125) for decoding an image of the video by block and is capable of obtaining representative weight values for each decoded block and weighting each decoded block with representative weight values being reverse to those applied at the coding device.
- 20 14. A video decoding device for decoding the coded data generated by the video coding device defined in claim 10, which is provided with a portion (124, 125, 141 to 144) for transforming and decoding and is capable of obtaining representative weight values for each transformed block and weighting each transformed block with the representative weight-values being reverse to those applied at the coding device.
- 25 15. A video coding device and a video decoding device for hierarchically encoding and decoding a video sequence by previously separating the video sequence into lower-layer frames codable at a lower frame rate and upper-layer frames whose one or more specified part-areas only are decodable at a higher frame rate, and by synthesizing an upper-layer part area with an lower-layer frame when decoding, which in case of decoding an upper frame in the absence of an lower-layer frame corresponding to said upper-layer frame synthesizes the absent lower-layer frame from preceding and proceeding lower-layer frames by using a first part-area-information and a second part-area-information of lower-layer frames existing temporally before and after the synthesizable frame and by weighted averaging the lower-layer frames existing temporally before and after the synthesizable lower-layer frame for synthesizing thereon an overlapped portion of a first part-area with a second part-area and an area not belonging to the first part-area and the second part-area, by using the lower-layer frame existing temporally after the synthesizable frame for synthesizing only the first part-area and by using the lower-layer frame existing temporally before the synthesizable frame for synthesizing only the second part area.
- 30 16. A video-coding device and a video-decoding device as defined in claim 15, characterized in that the lower-layer frame is synthesized by using two lower-layer frames existing temporally near to the synthesizable frame or only the first lower-layer frame or only the second lower-layer frame for synthesizing an overlapped portion of the first part-area and the second part-area and an area not belonging to the first part area and the second part area.
- 35 17. A video-coding device and a video-decoding device as defined in claim 15 or claim 16, characterized in that it is provided with motion parameter estimating means (231) for estimating an interframe motion parameter between the first lower-layer frame and the second lower-layer frame and deforming means (232) for deforming the first lower-layer frame, the second lower-layer frame, the first part-area and the second part-area by motion compensation of the motion parameter based on the temporal position of the synthesizable lower-layer frame, and it synthesizes the lower-layer image by using respective deformed images and area-information.
- 40 18. A video-coding device and a video-decoding device as defined in claim 17, characterized in that the motion vector information obtained by motion compensative prediction coding is used in synthesizing the lower-layer frame and the deforming means (232) use a motion vector of each block as the motion parameter or determine a parameter representing a whole image from the block motion vectors.
- 45 19. A video-coding device and a video-decoding device for encoding and decoding video by using area information representing a shape of an object-area or a shape of a part-area, which is provided with area-information approximating means (241) for approximating the area-information by a plurality of geometrical figures in encoding and decoding the area-information, approximated area-information coding and decoding means (242, 252), non-ap-
- 50
- 55

proximated area-information coding and decoding means for encoding and decoding the area-information without approximation and adaptive selecting means for adaptively selecting either of the approximated area-information coding and decoding means (242, 252) and the non-approximated area-information coding and decoding means to effectively encoding and decoding area-information.

5

20. A video-coding device and a video-decoding device as defined in claim 19, characterized in that it is provided with area-information converting means for converting the area information into eight-directional quantized data, difference-data calculating means for determining a difference between the eight-directional quantized data and variable-length coding and decoding means for variable-length encoding and decoding the difference data and it may efficiently perform reversible coding and decoding of the area-information.

10

21. A video-coding device and a video-decoding device as defined in claim 19, characterized in that it is provided with interframe-differential calculating means for determining an interframe difference of geometrical figure information in coding and decoding the approximated area-information, variable-length coding and decoding means for variable-length coding and decoding the difference data, change-information adding means for adding information indicating no change of area-information when the difference data being all 0, and thereby, it may reversibly encode and decode the approximated area-information at a high efficiency.

15

22. A video coding device and a video decoding device for encoding and decoding a video sequence by previously separating the video sequence into lower-layer frames codable at a lower frame rate and upper-layer frames whose one or more specified part-areas only are decodable at a higher frame rate, wherein a weight-information generating device is used for generating, from binarized part-area information, many-valued weight information usable for synthesizing an upper-layer video-sequence with an lower-layer video-sequence by weighted averaging method and is provided with horizontal-length detecting means for detecting a length of each horizontal line of each area-information by horizontally scanning therein, first weight-function deciding means for determining a horizontal weight-function from the horizontal line length, vertical-length detecting means for detecting a length of each vertical line of each area-information by vertically scanning therein and second weight-function deciding means for determining a vertical weight-function from the vertical line length and which generates the many-valued weight-information by using the horizontally-directed weight and the vertically directed weight.

20

25

30

23. A video-coding device and a video-decoding device for encoding and decoding video by using area information representing a shape of an object-area or a shape of a part-area, which is provided with mean-value calculating means (271) for determining a mean value of pixels in an area from input image and corresponding thereto area information in adaptively changing-over from interframe prediction coding to intraframe coding, storing means (272) for storing the mean value, difference calculating means (273) for determining a difference between mean values of a preceding frame and a current frame and comparing means (274) for comparing the difference with a specified value and which selects the intraframe coding when the difference exceeds the specified value.

35

24. A video-coding device for separating a video-sequence into background image areas and a plurality of foreground part-images and separately encoding each separated background area and each part-image area, which is provided with area discriminating means (281) for determining whether coding data and coding blocks exist in or out of a part area, coded-data-amount calculating means (285) for separately calculating the number of coded data in the part-image area and the number of coded data in the background image area and distribution ratio calculating means (284) for determining distribution ratios of the target number of coding-data to the part-image area and the background-image area and which may adaptively determine the ratios of distributing the target number of coding data.

40

45

50

55

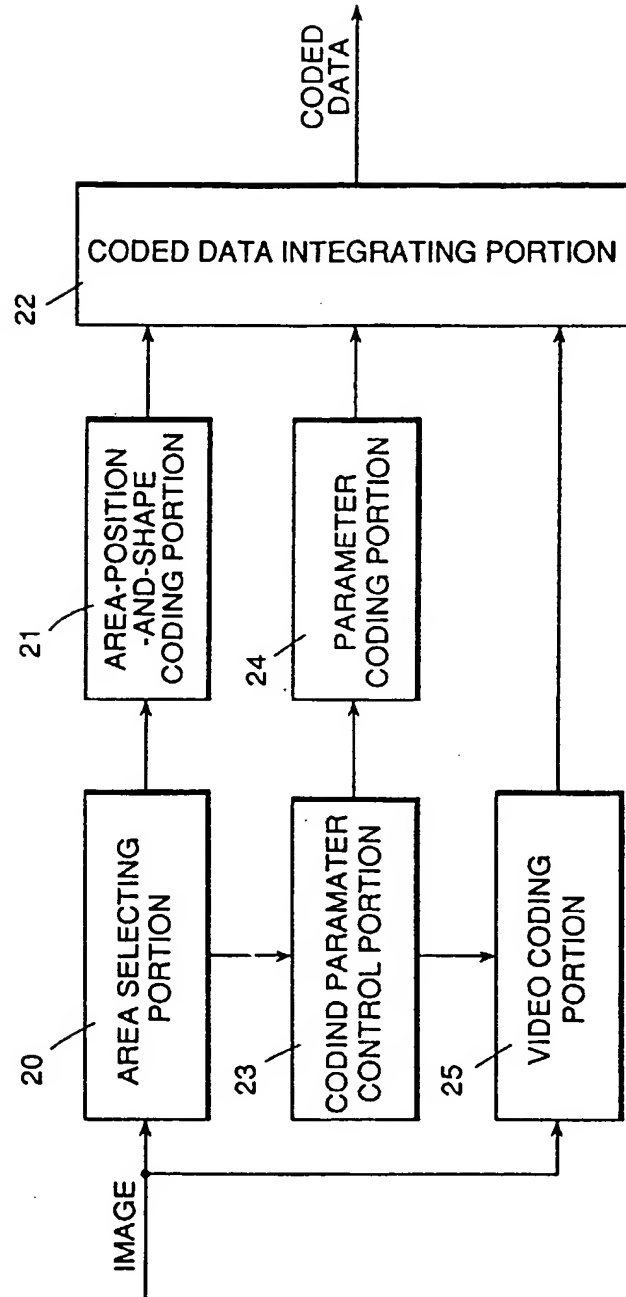
FIG.1  
(PRIOR ART)



FIG.2

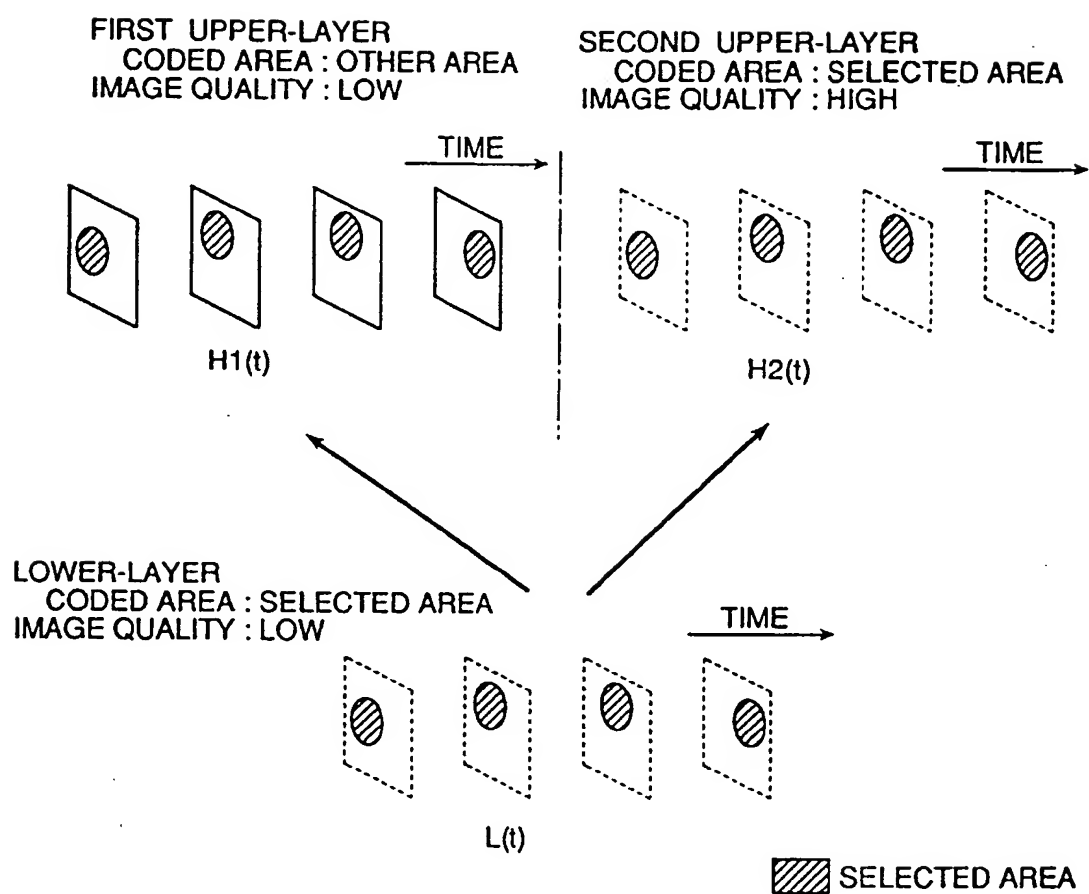


FIG.3

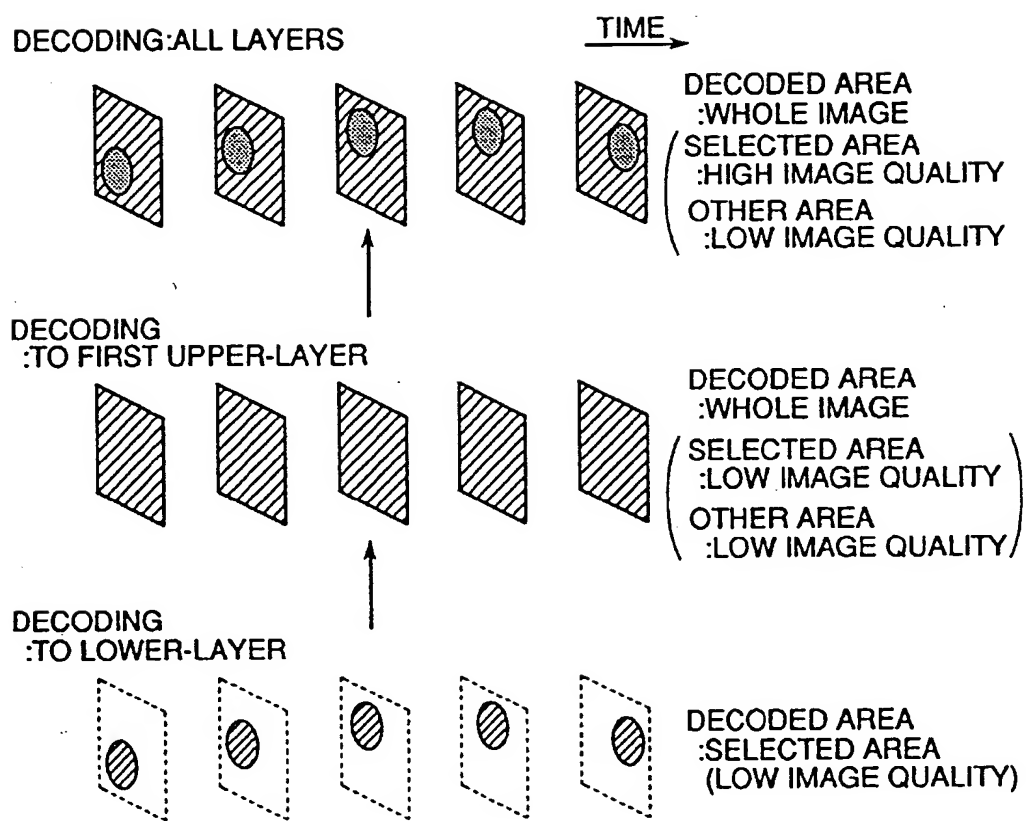


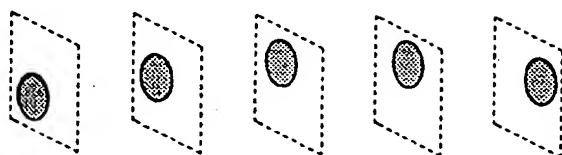
FIG.4

DECODING:ALL LAYERS



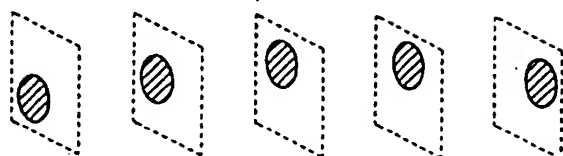
DECODED AREA  
:WHOLE IMAGE  
SELECTED AREA  
:HIGH IMAGE QUALITY  
OTHER AREA  
:LOW IMAGE QUALITY

DECODING  
:TO SECOND UPPER-LAYER



DECODED AREA  
:SELECTED AREA  
(HIGH IMAGE QUALITY)

DECODING  
:TO LOWER-LAYER



DECODED AREA  
:SELECTED AREA  
(LOW IMAGE QUALITY)

FIG.5

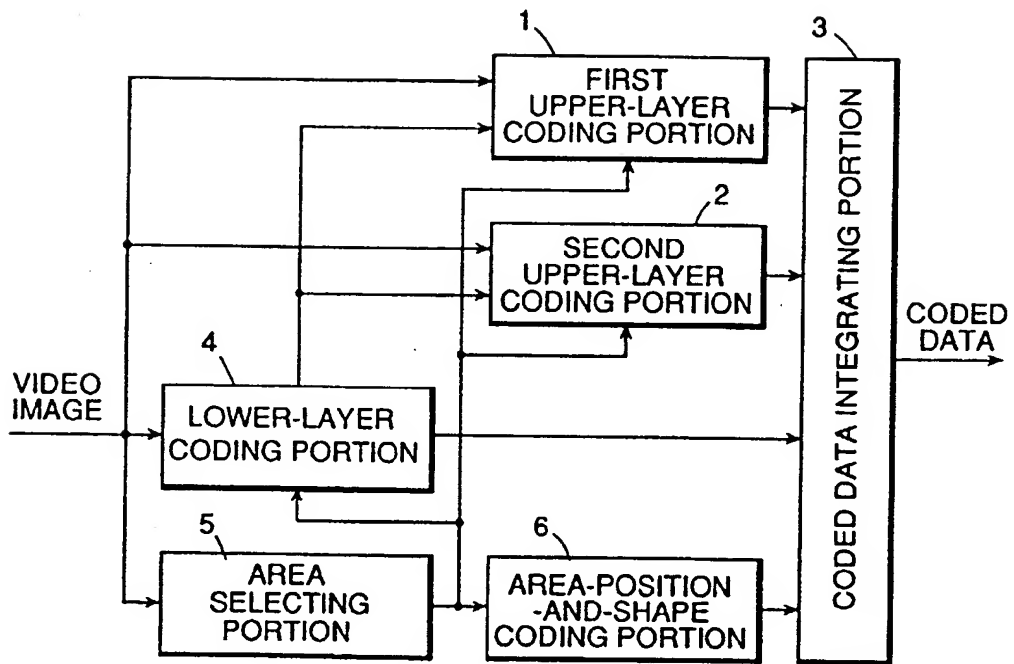


FIG.6

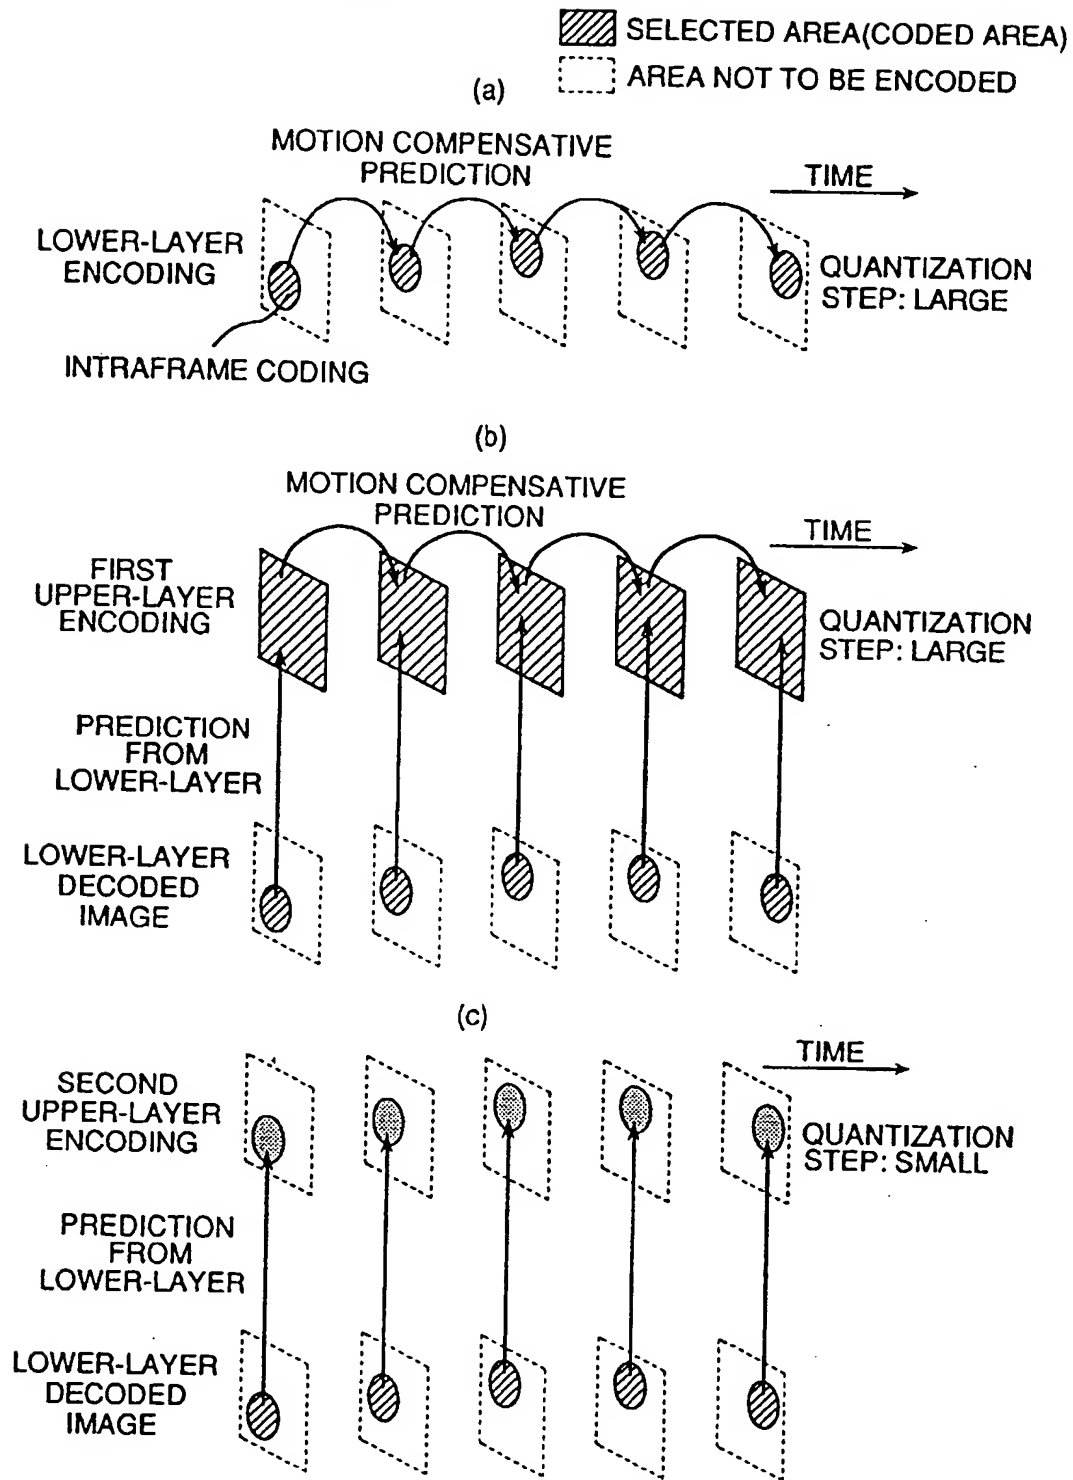


FIG.7

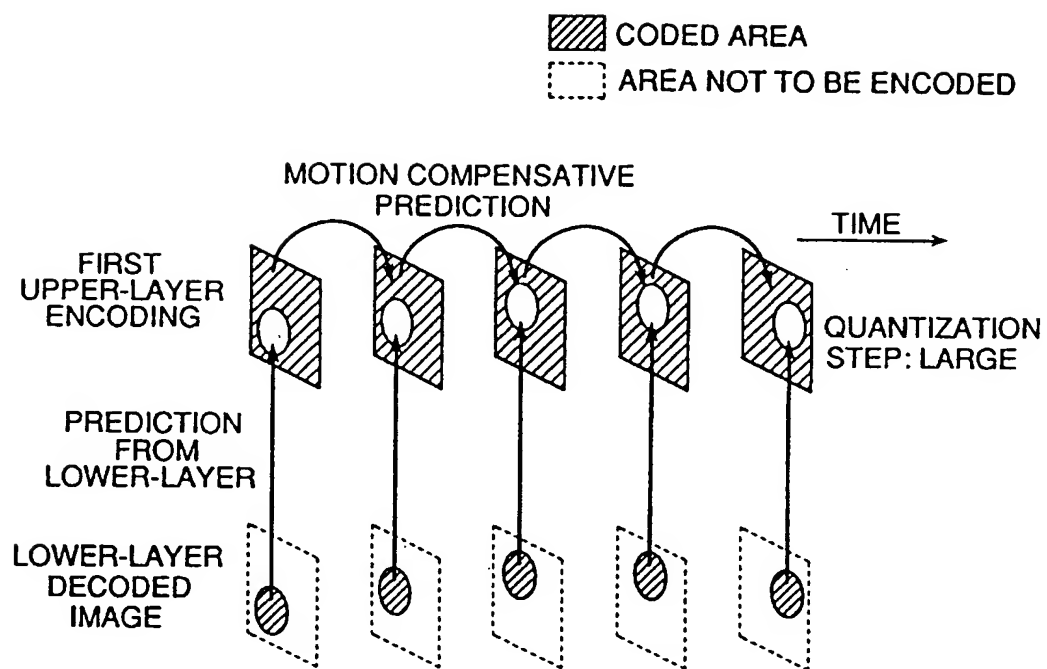


FIG.8

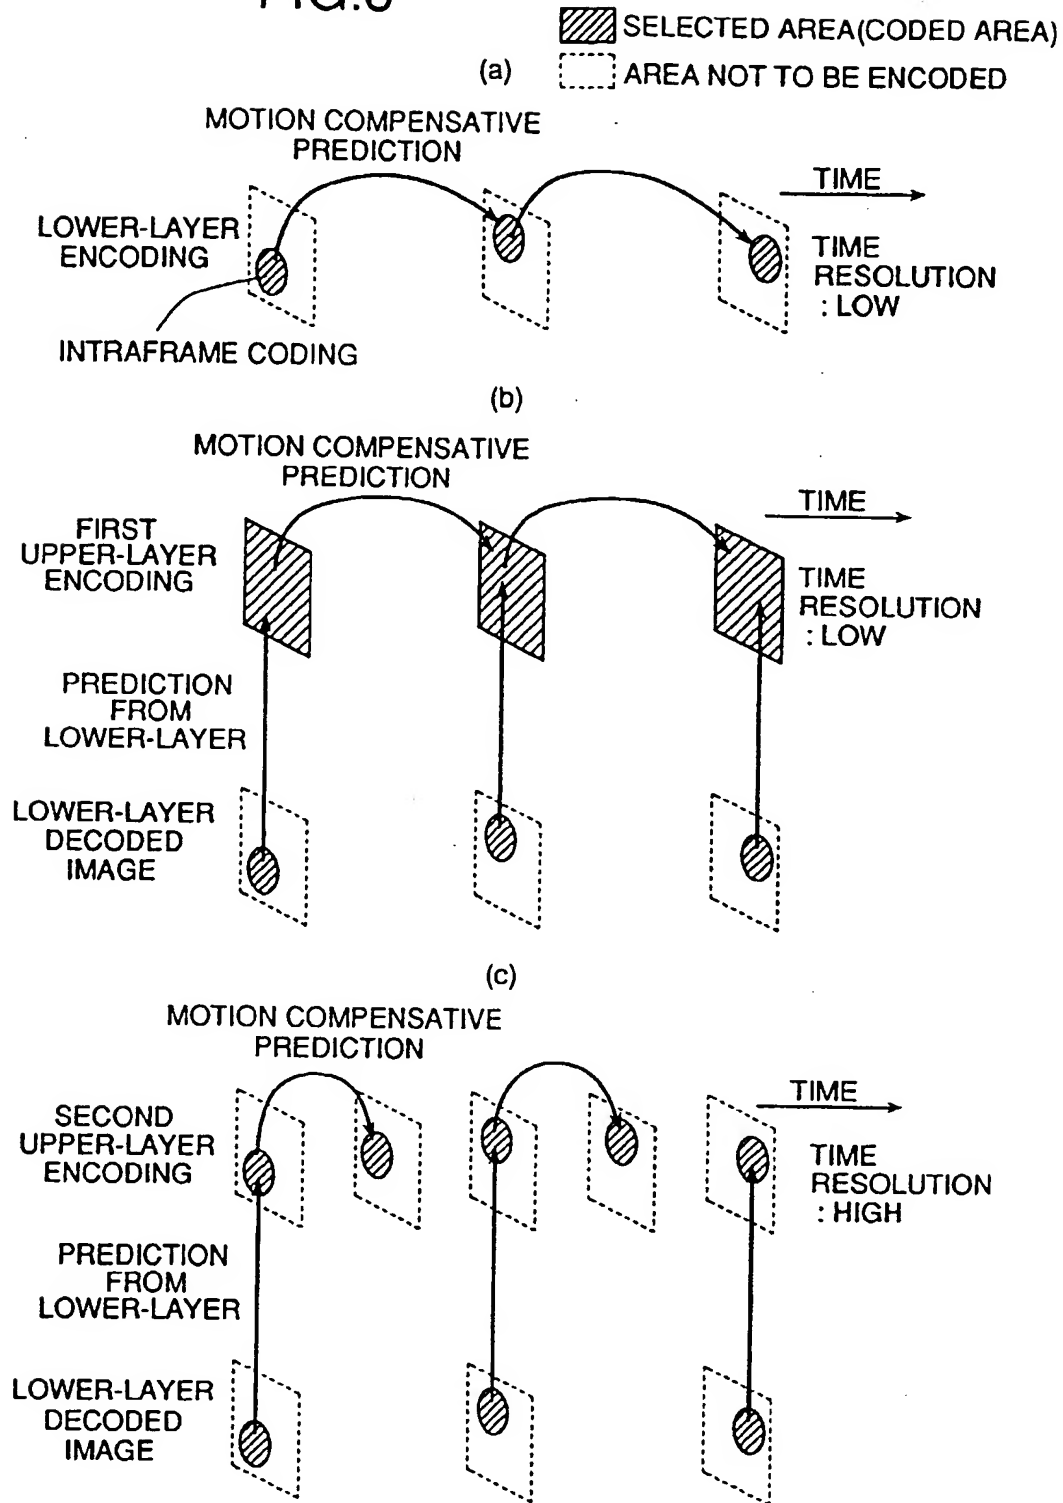


FIG.9

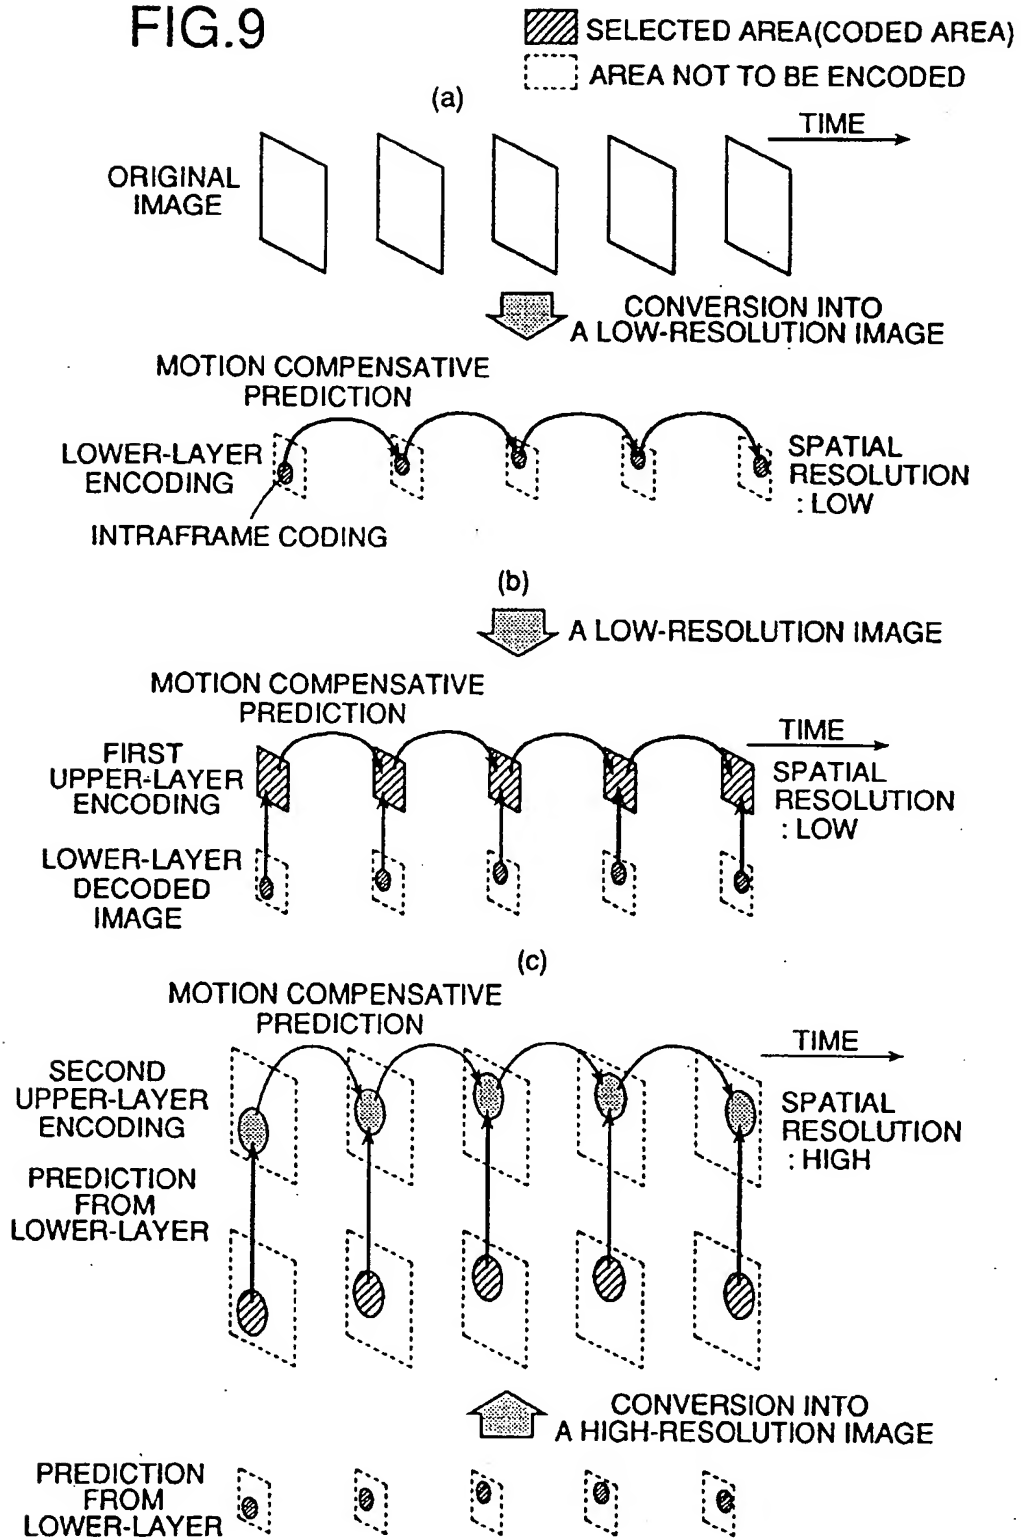




FIG.10

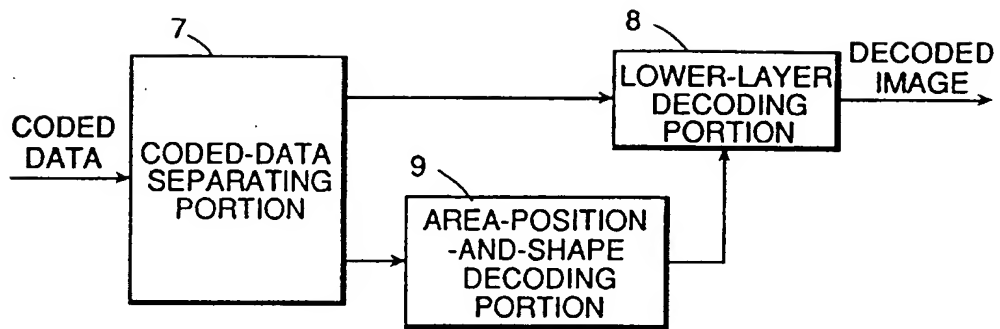


FIG.11

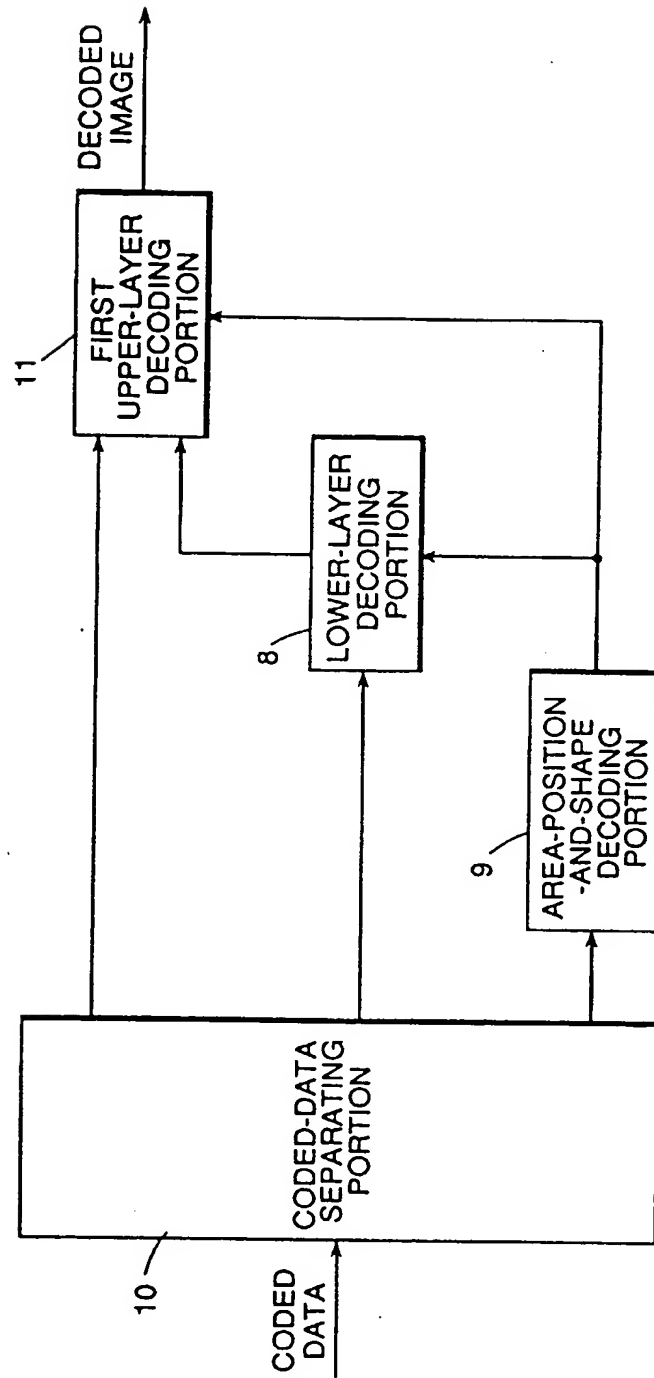


FIG.12

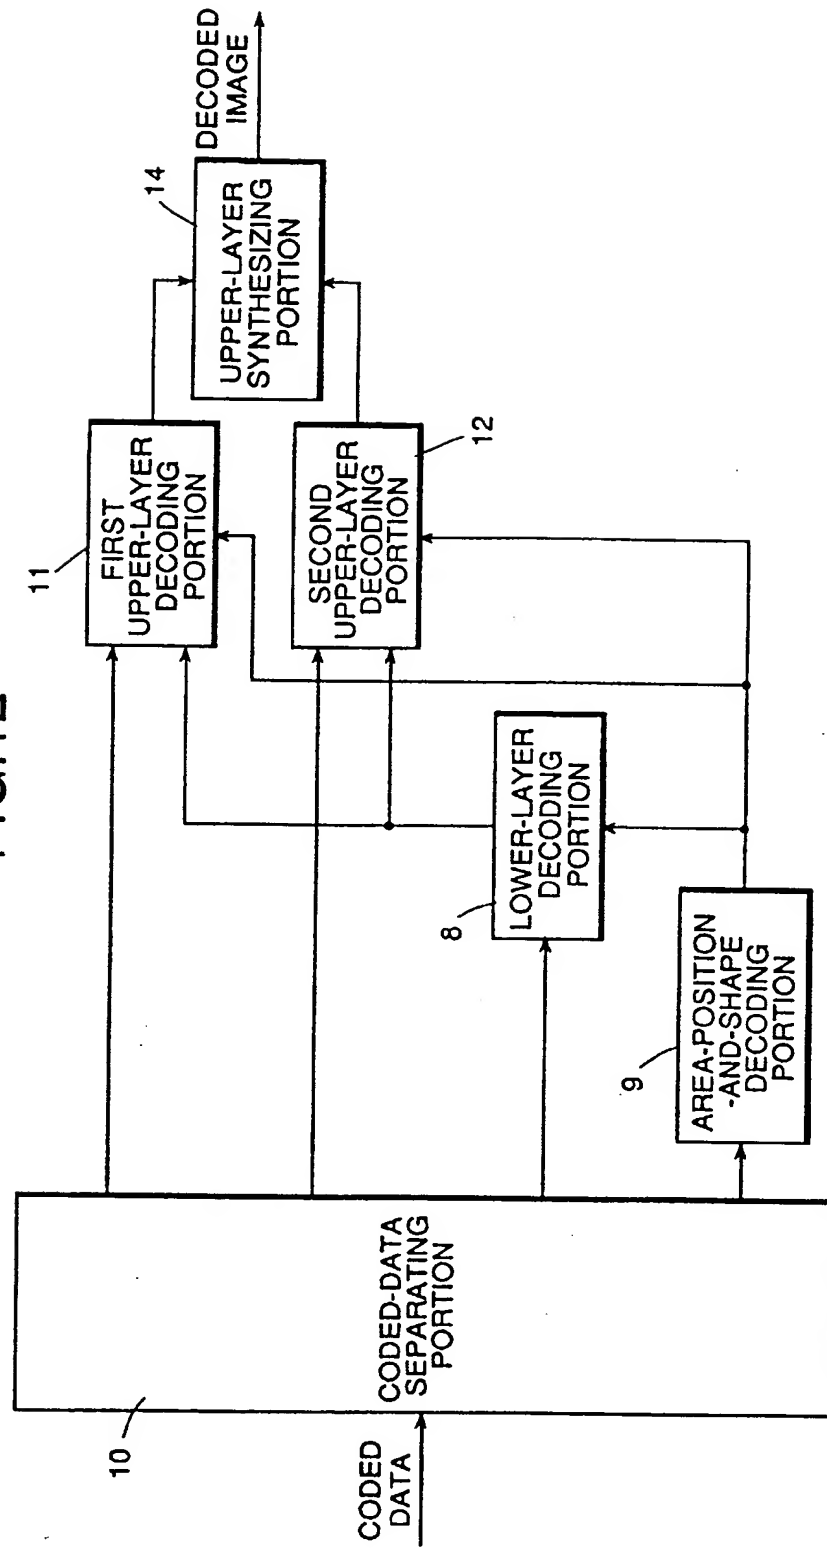


FIG.13

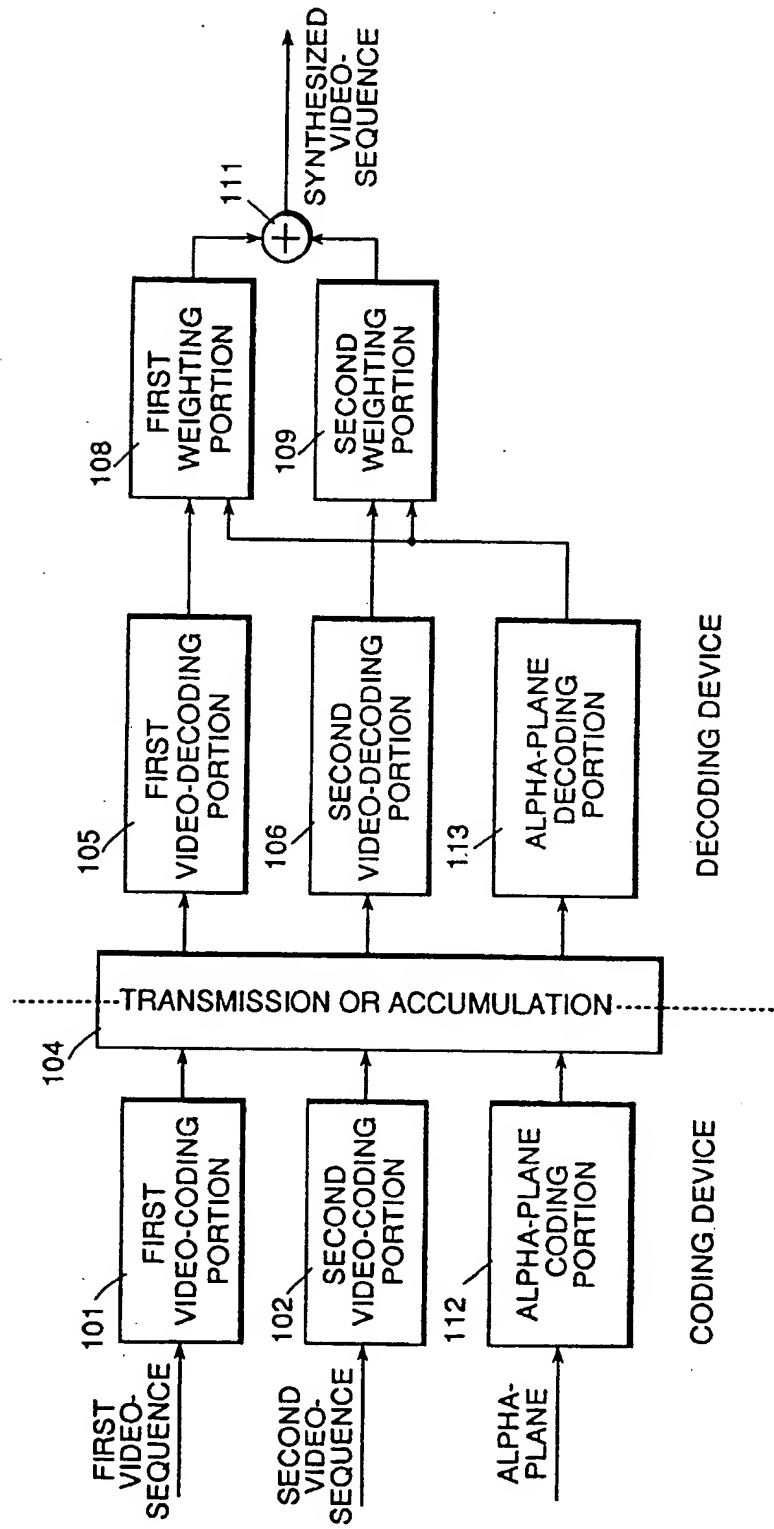


FIG.14

0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.2	0.5	0.2	0.1	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.1	0.3	1.0	0.5	0.1	0.1	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.2	0.3	1.0	1.0	1.0	0.3	0.2	0.0	0.0	0.0	0.0
0.0	0.0	0.2	0.5	1.0	1.0	1.0	1.0	1.0	0.4	0.1	0.0	0.0	0.0
0.0	0.1	0.3	0.5	1.0	1.0	1.0	1.0	1.0	0.5	0.2	0.0	0.0	0.0
0.0	0.0	0.2	0.5	1.0	1.0	1.0	1.0	1.0	0.5	0.1	0.0	0.0	0.0
0.0	0.0	0.0	0.1	0.3	1.0	1.0	1.0	0.3	0.2	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.1	0.3	1.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

FIG.16

0	0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	1	0	0	0	0	0	0	0
0	0	0	0	0	0	1	1	0	0	0	0	0	0
0	0	0	0	0	1	1	1	0	0	0	0	0	0
0	0	0	1	1	1	1	1	1	0	0	0	0	0
0	0	0	1	1	1	1	1	1	1	0	0	0	0
0	0	0	1	1	1	1	1	1	1	0	0	0	0
0	0	0	0	0	1	1	1	0	0	0	0	0	0
0	0	0	0	0	0	1	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0	0

FIG.15

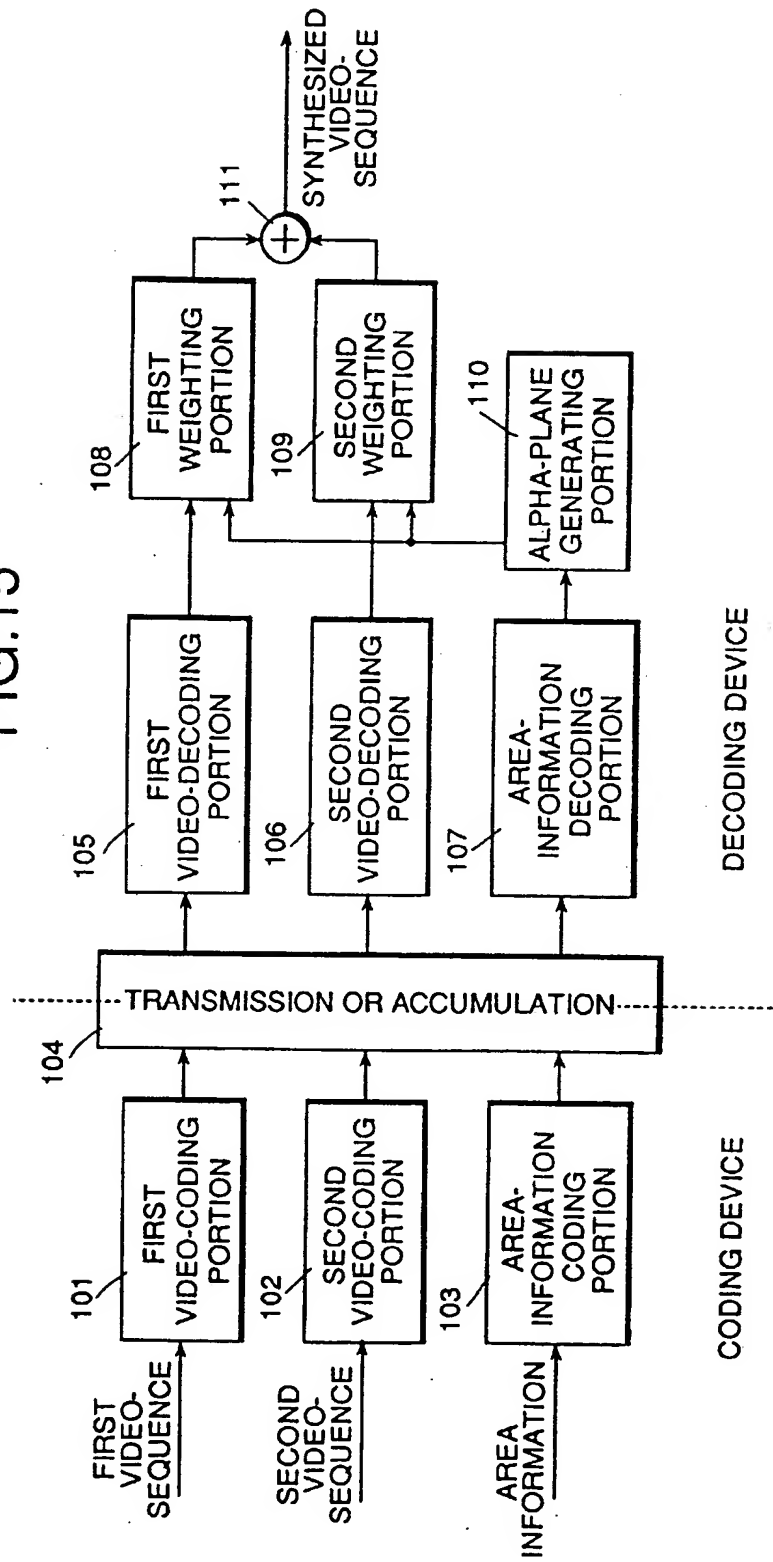


FIG.17

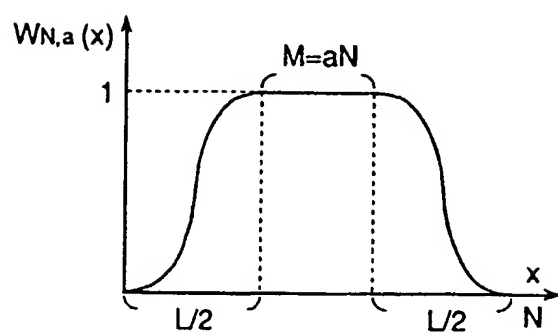


FIG.18

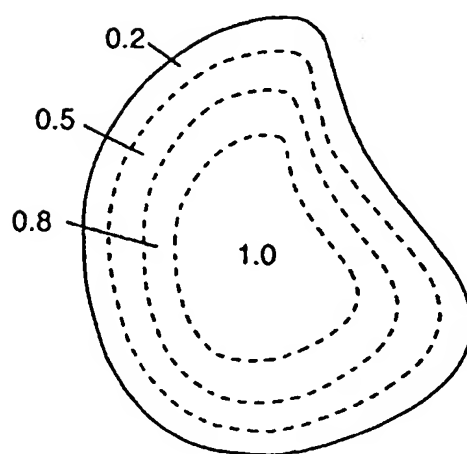


FIG.19

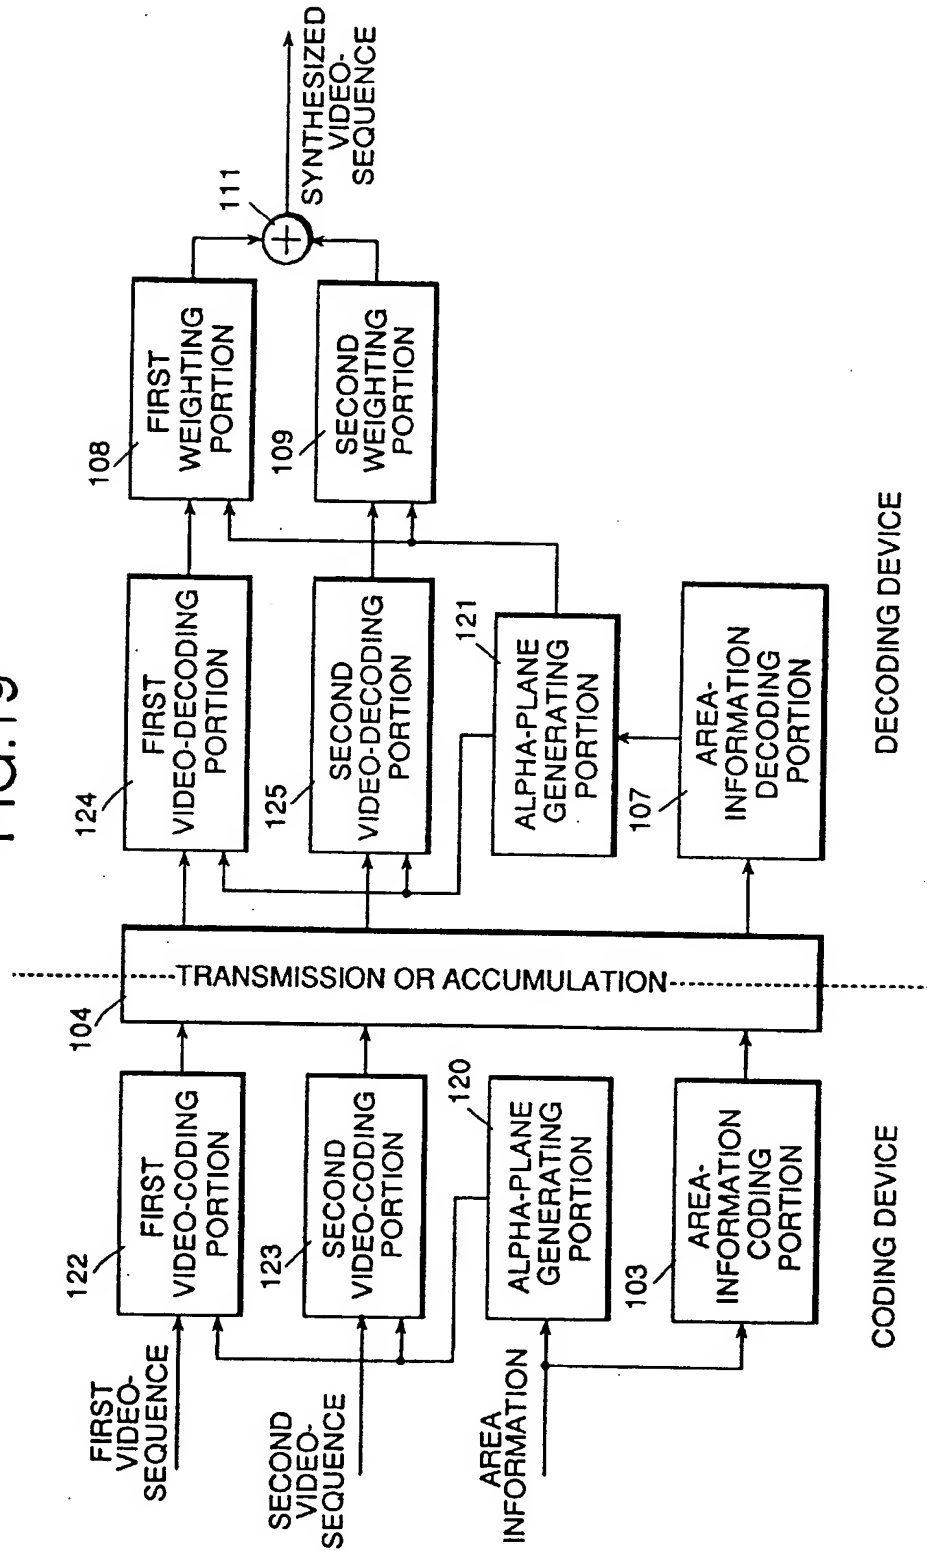




FIG.20

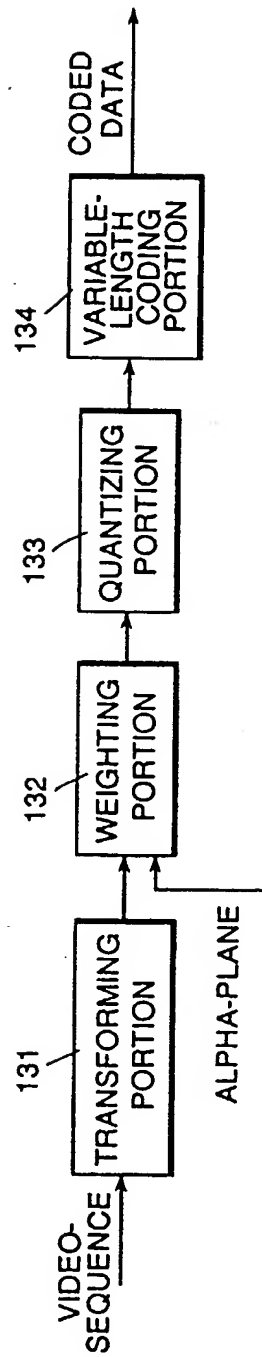


FIG.21

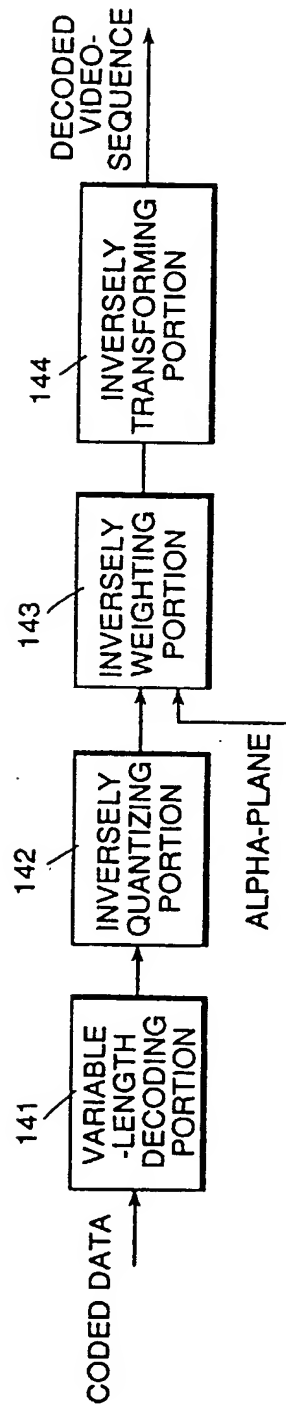


FIG.22

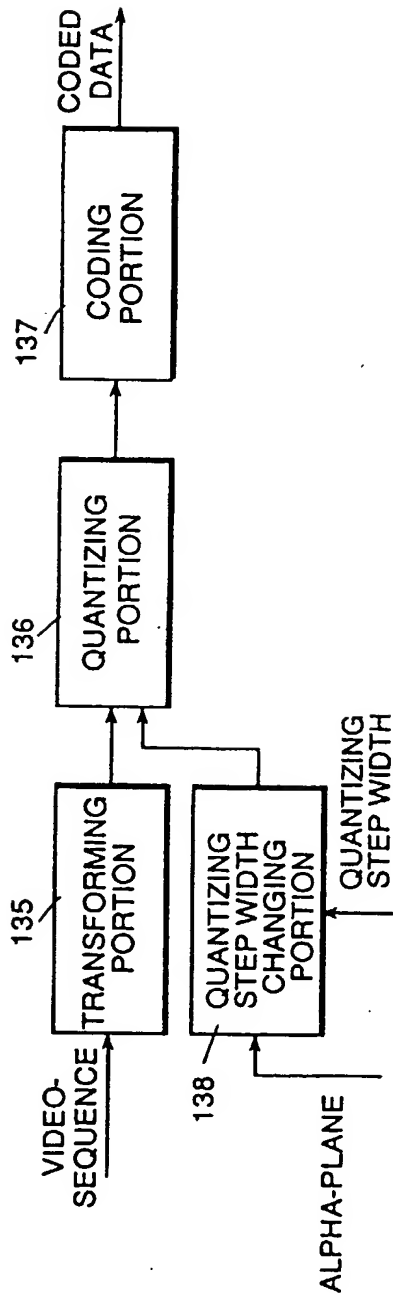


FIG.23

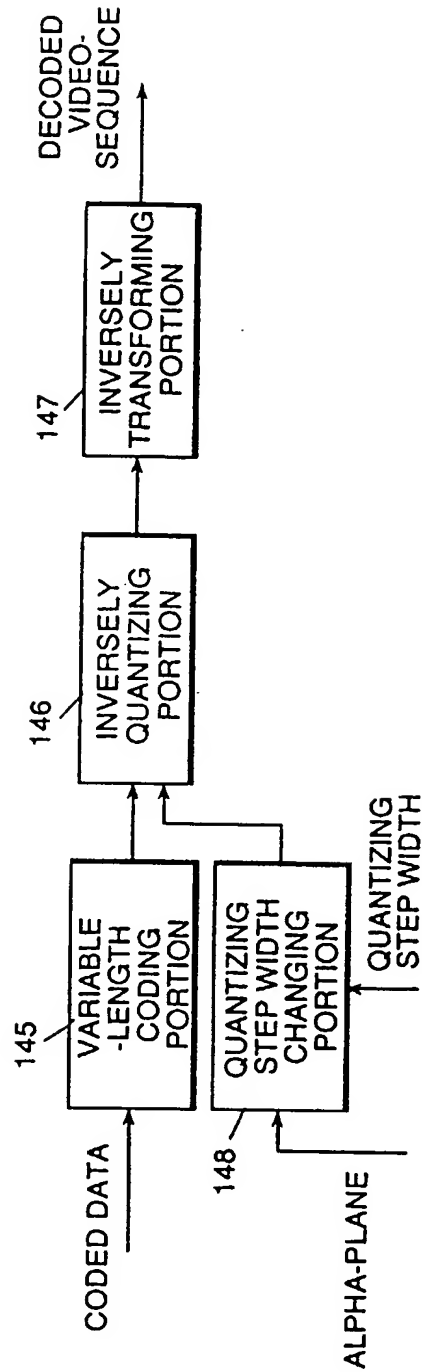


FIG.24

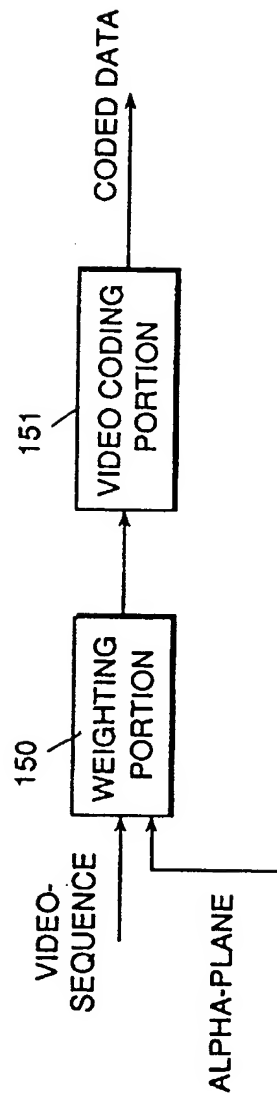


FIG.25

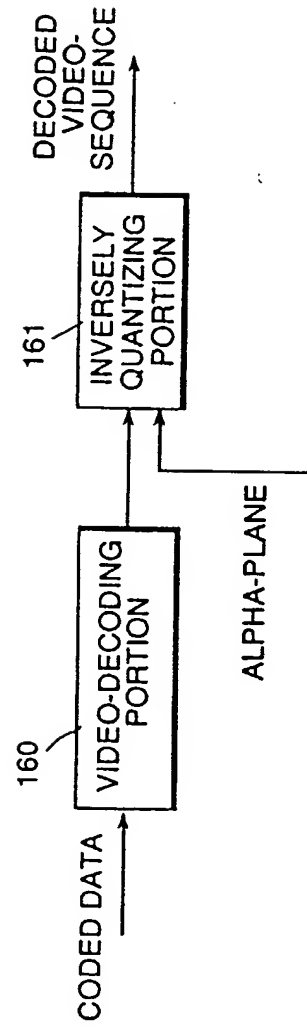


FIG.26

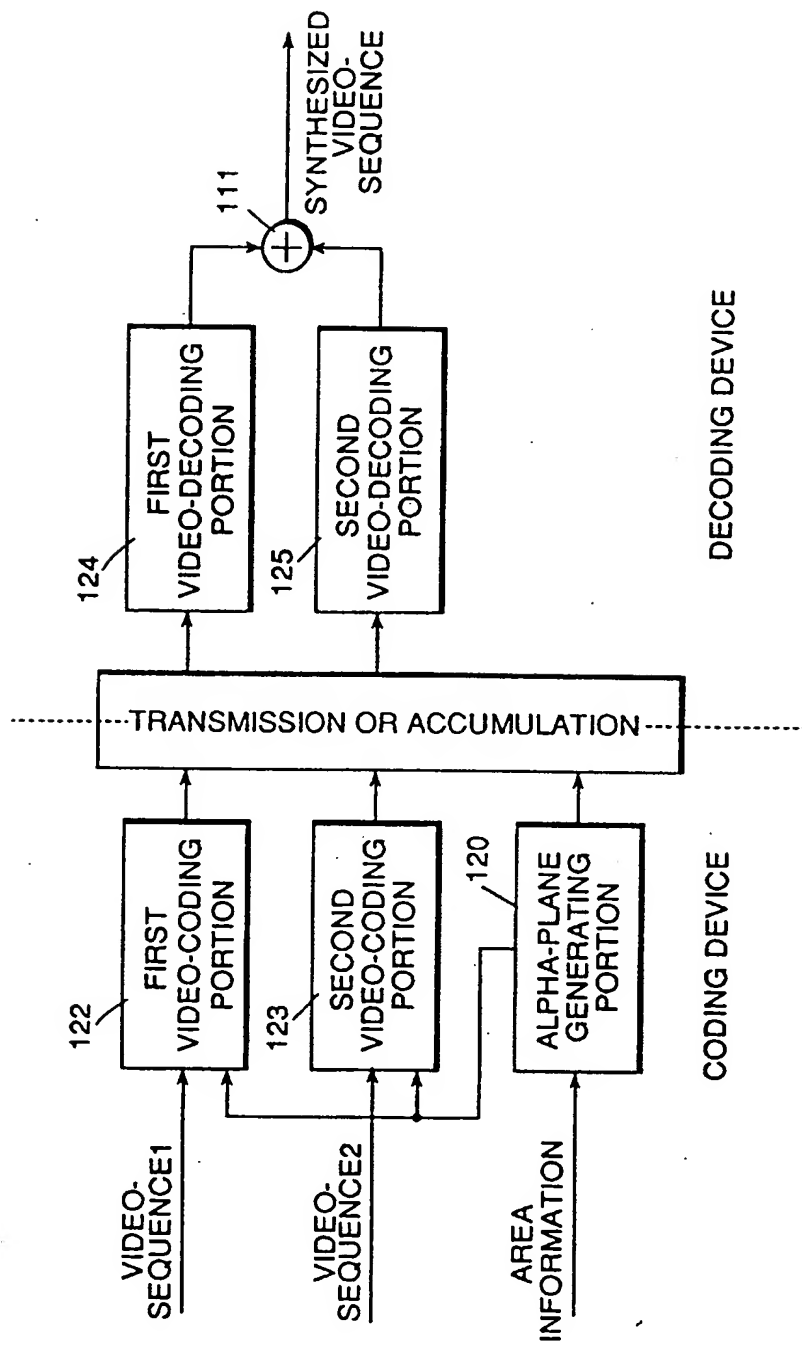


FIG.27

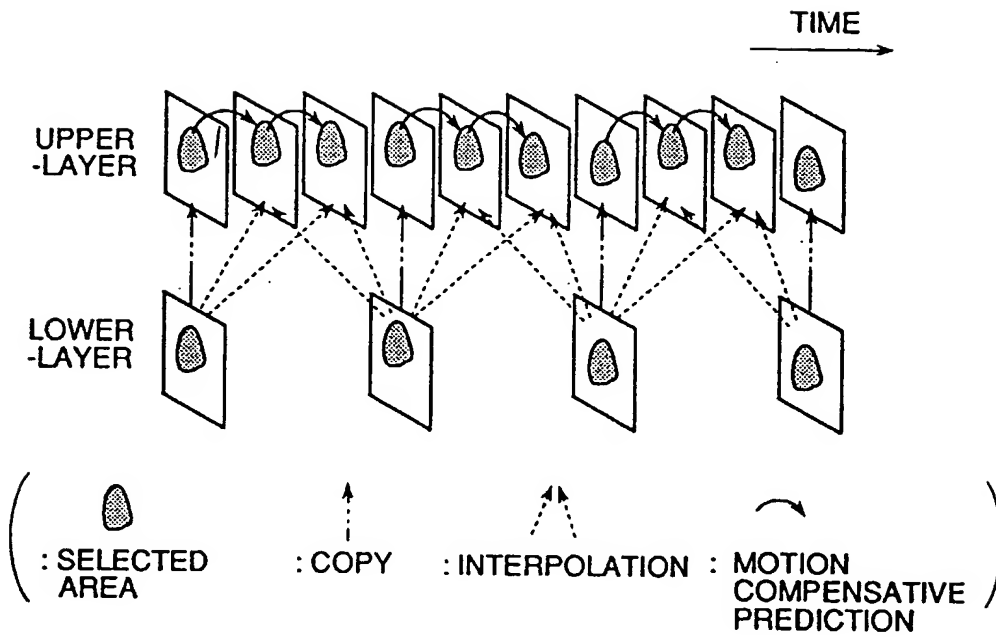


FIG.28

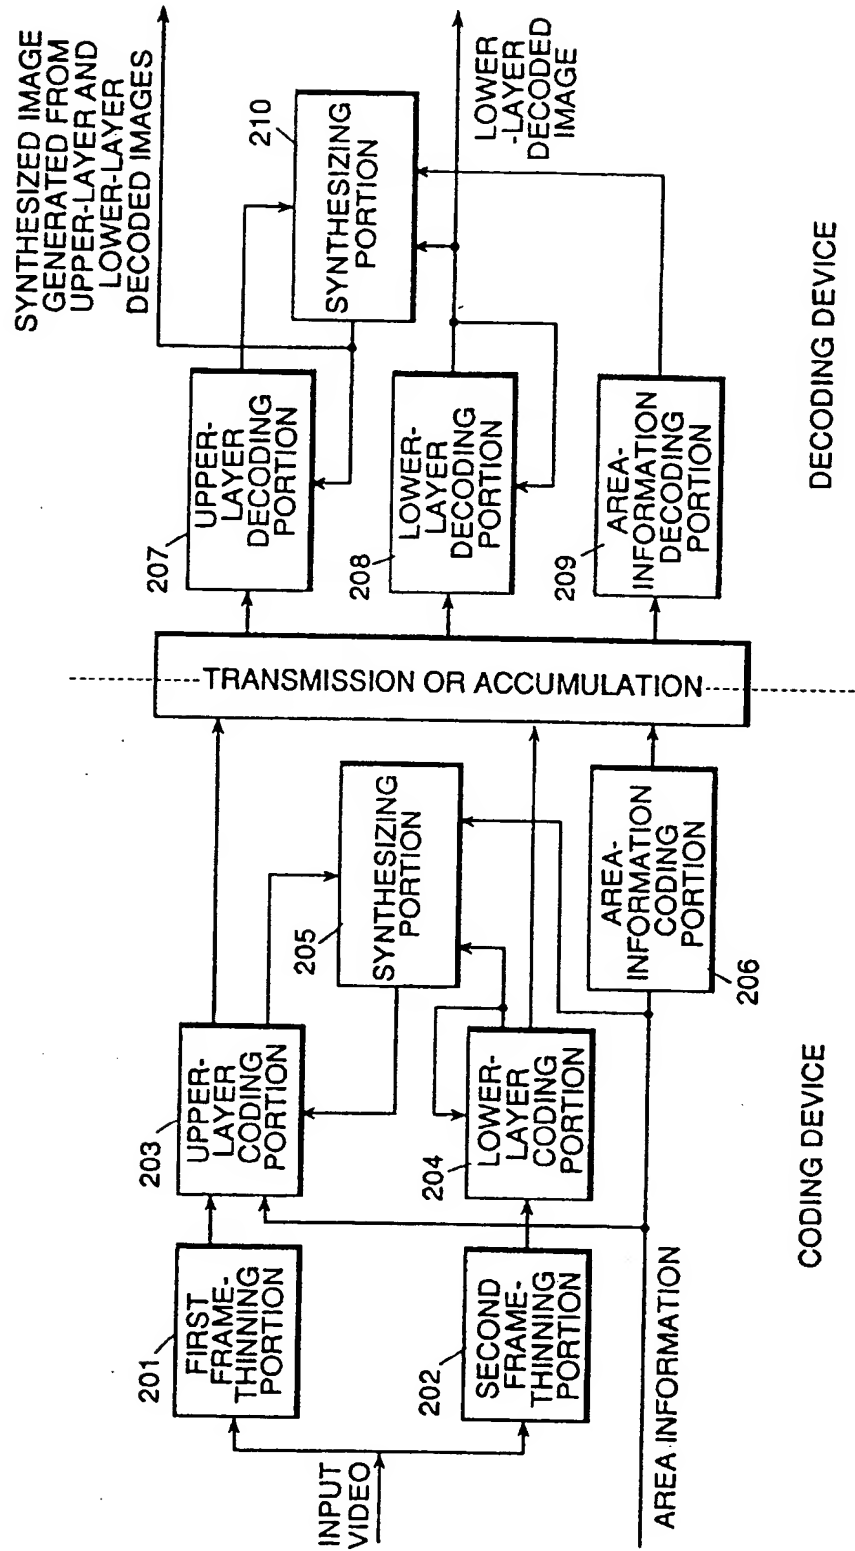


FIG.29

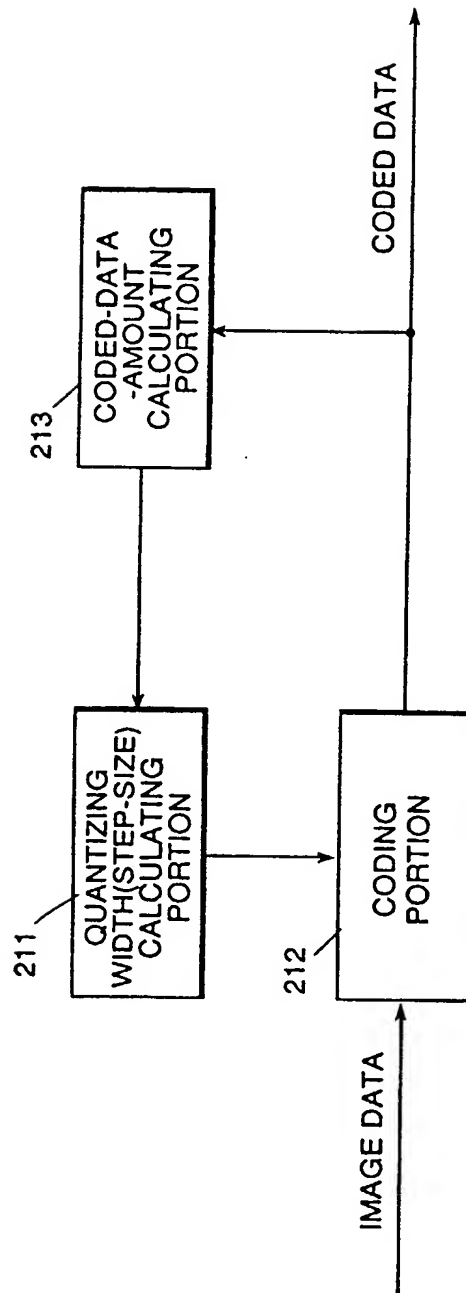


FIG.30




FIG.31

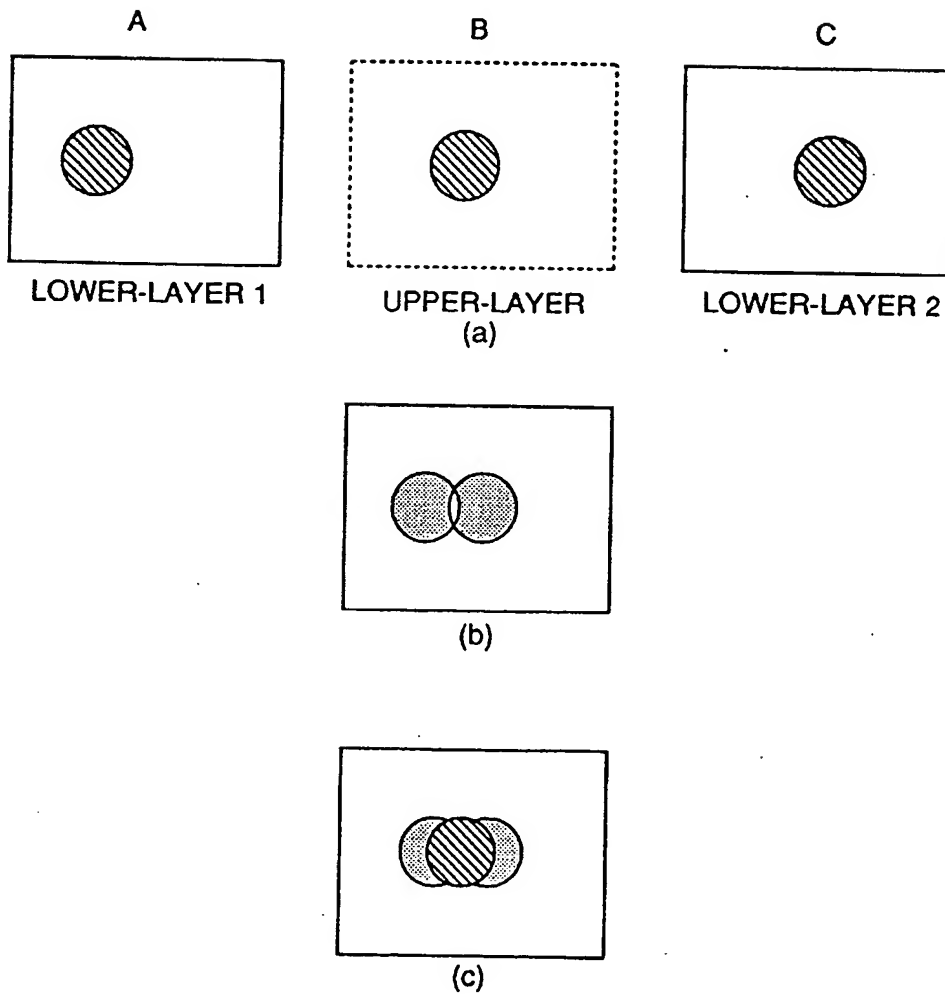




FIG.32

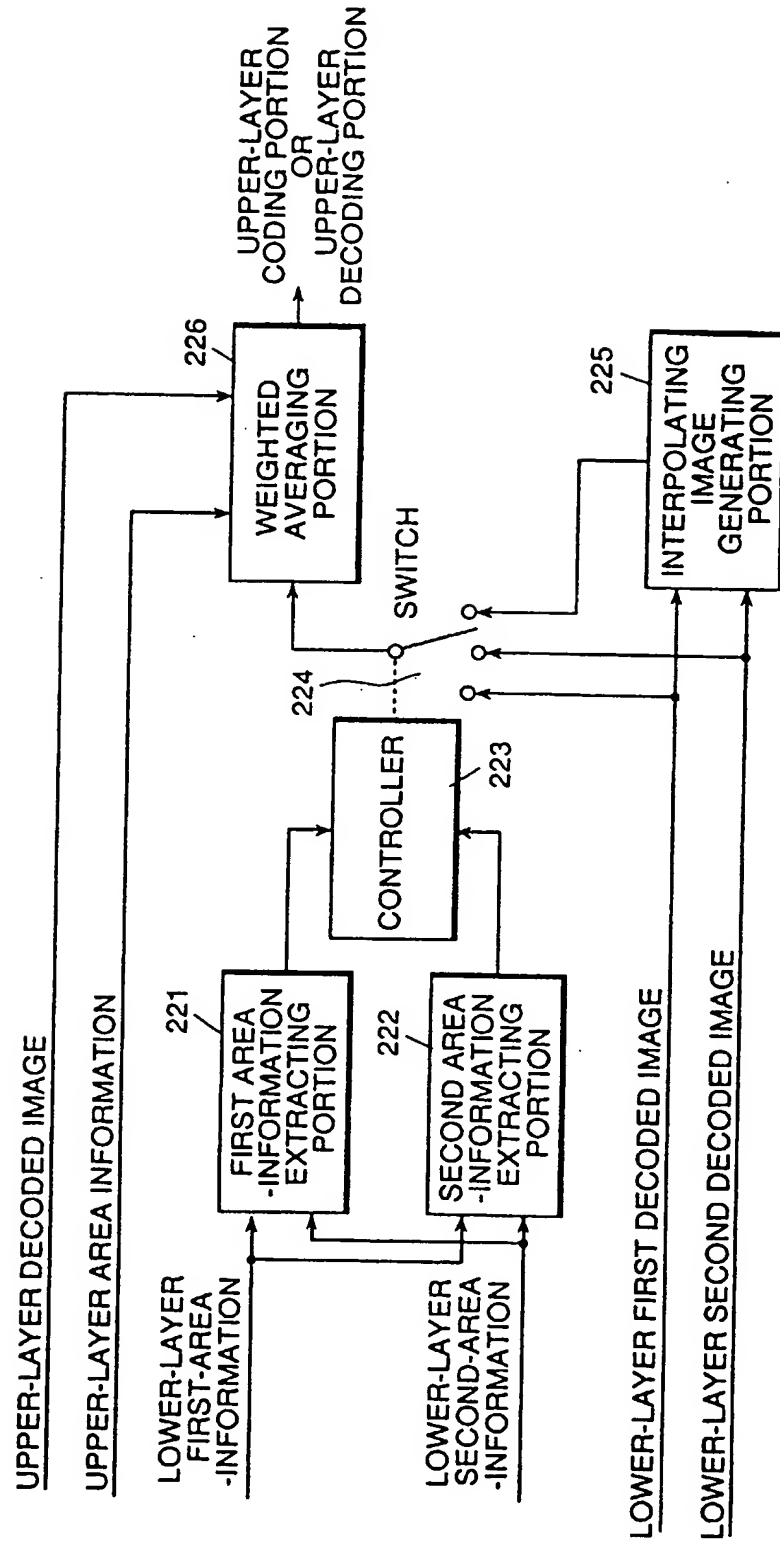


FIG.33

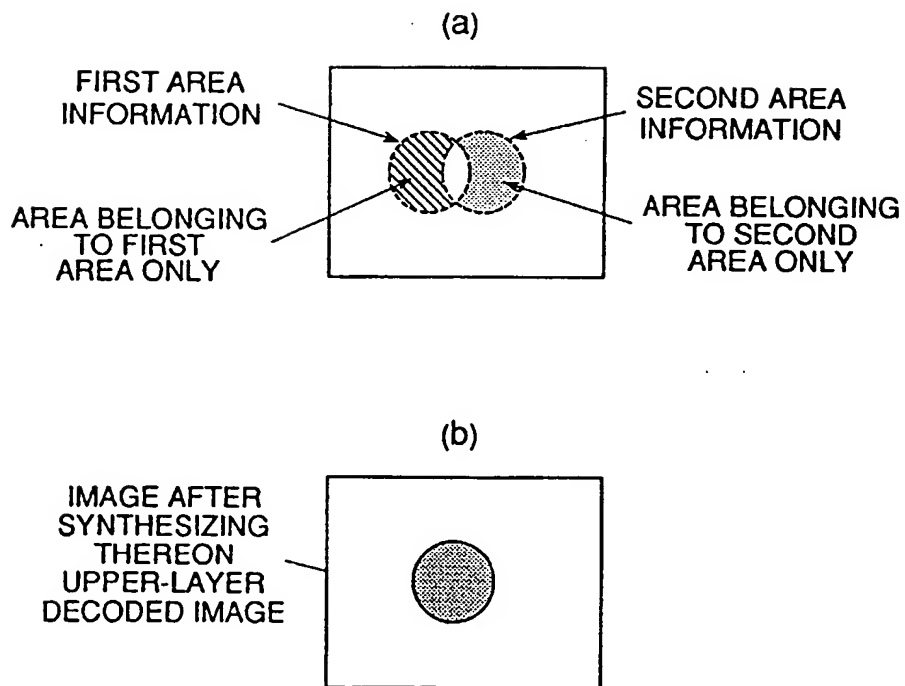


FIG.34

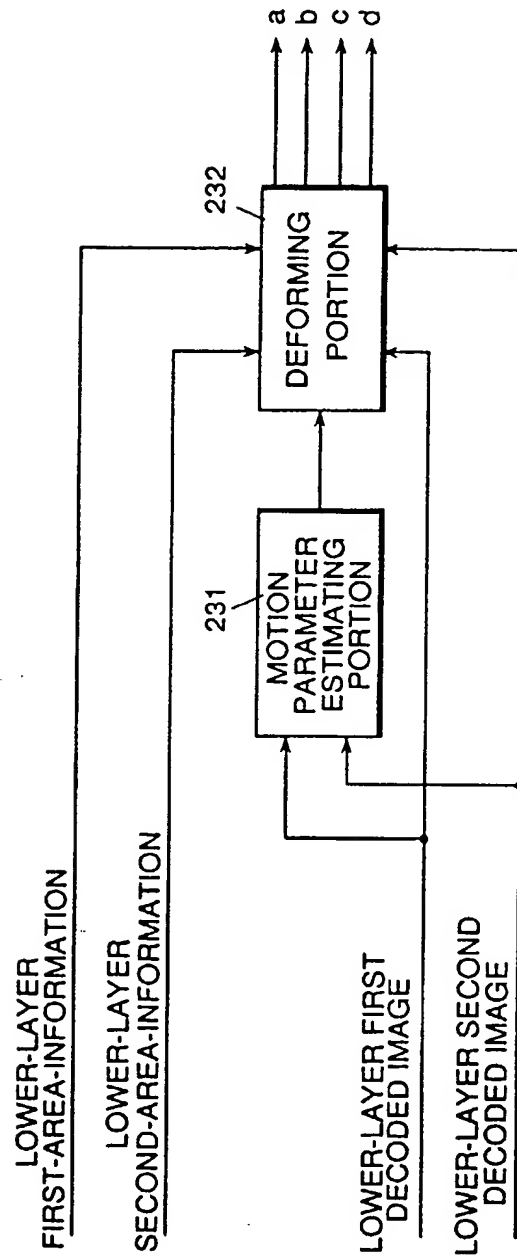


FIG.35

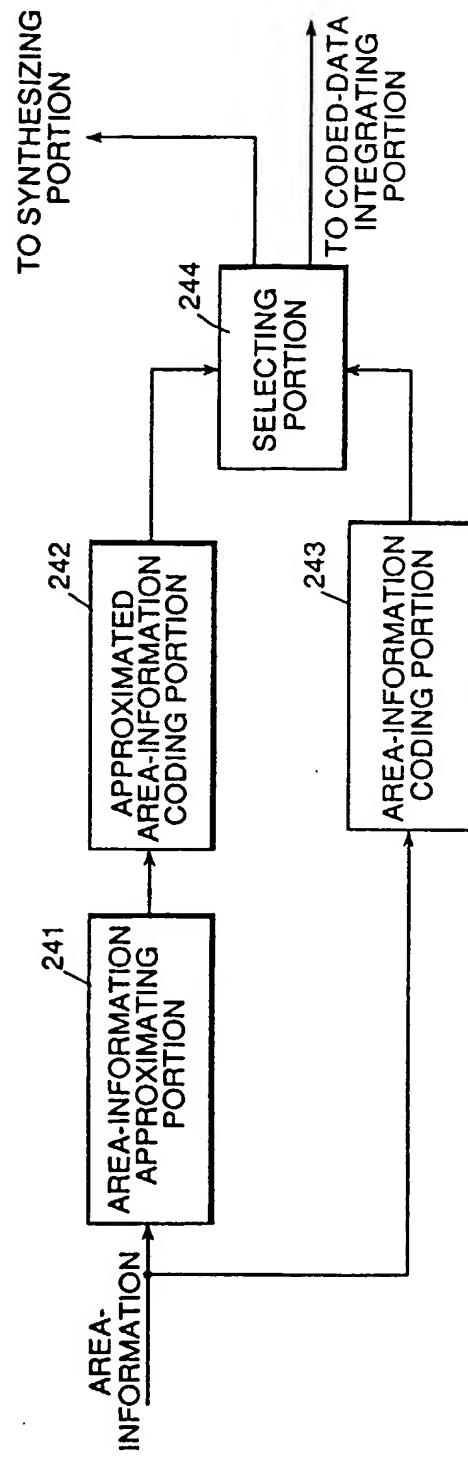


FIG.36

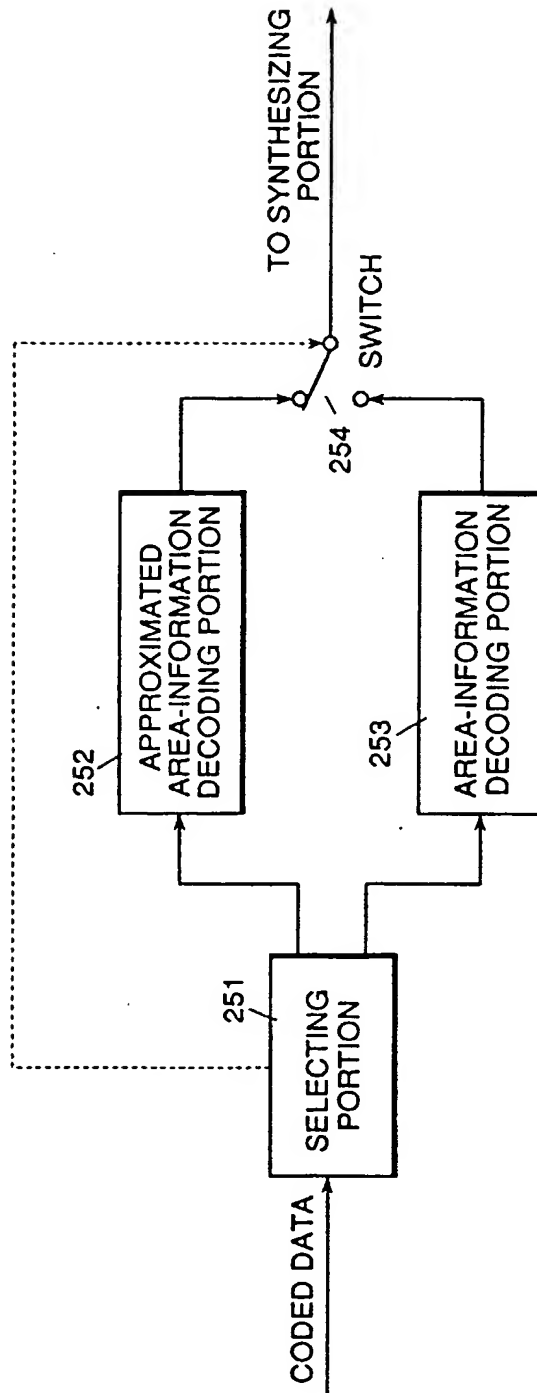


FIG.37

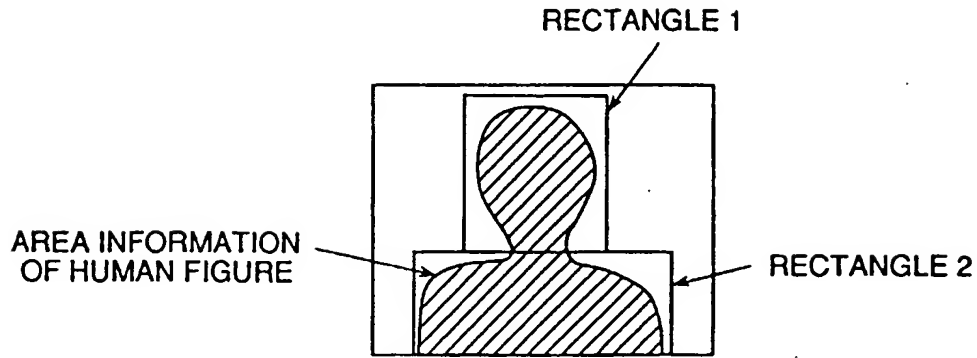
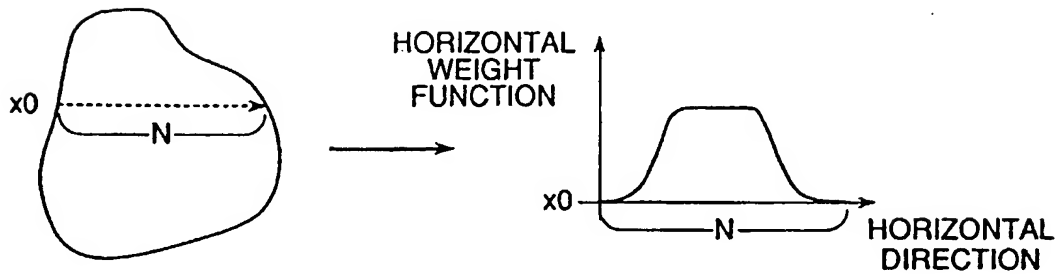


FIG.39

(a)



(b)

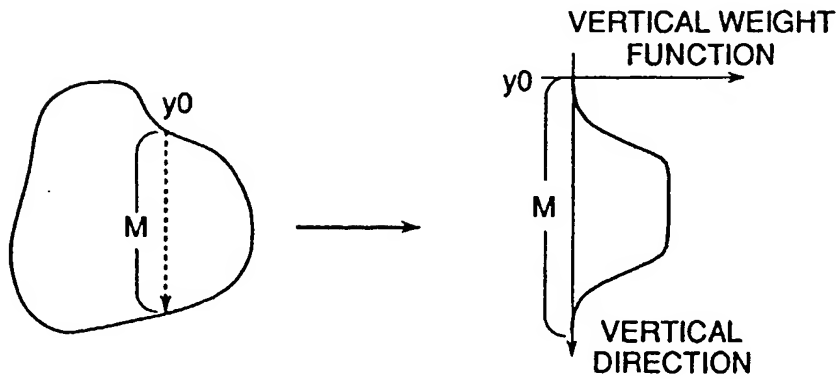


FIG.38

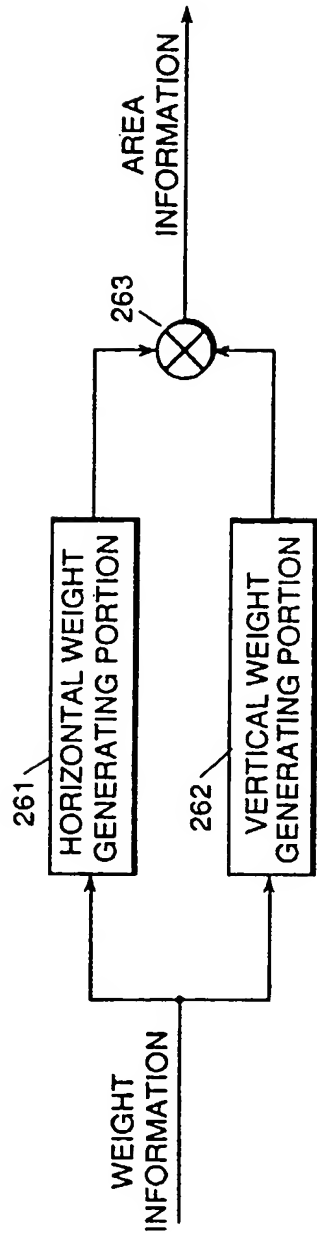


FIG.40

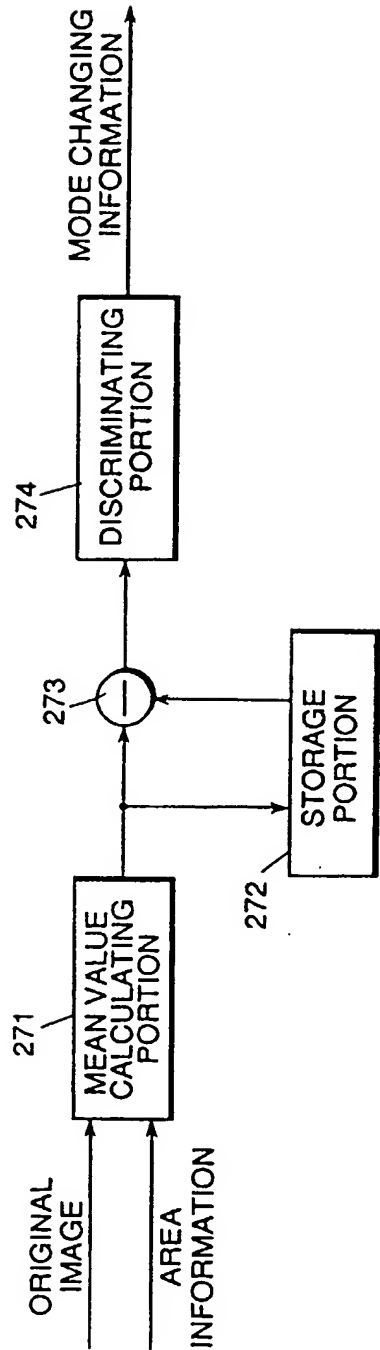


FIG.41

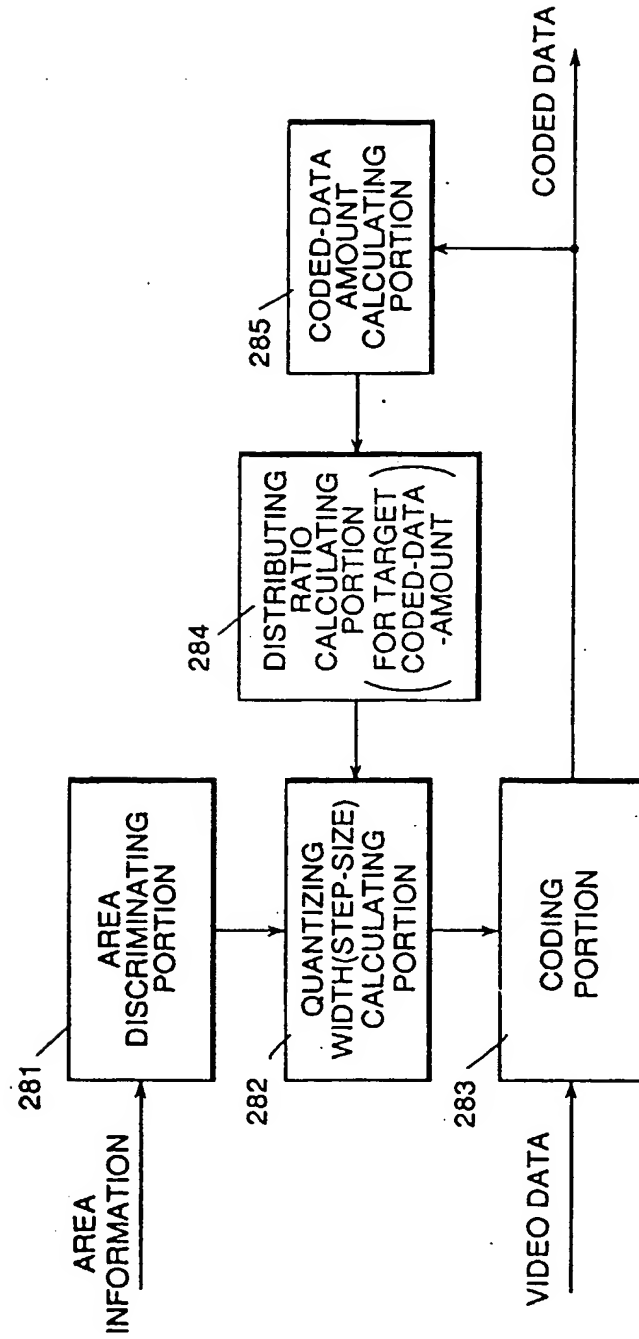




FIG.42

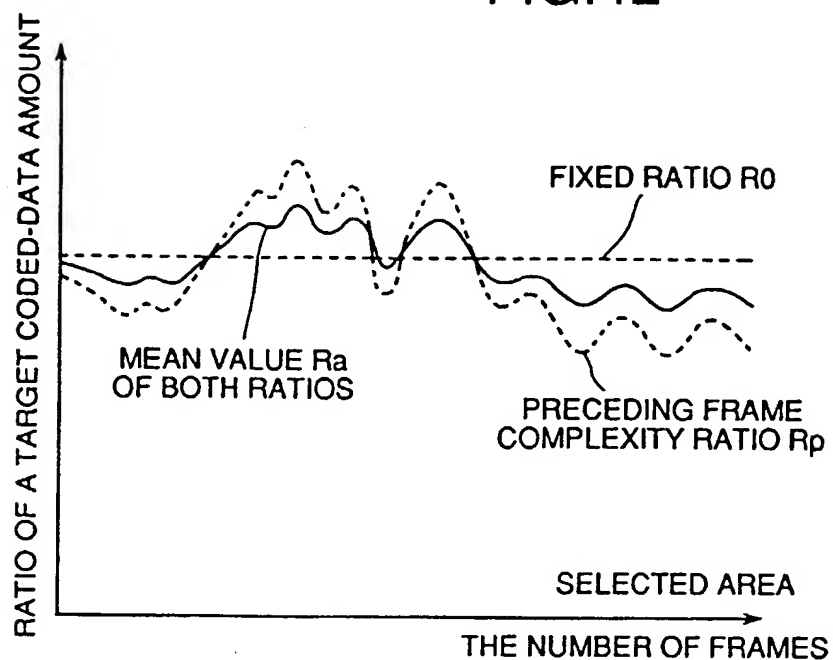


FIG.43

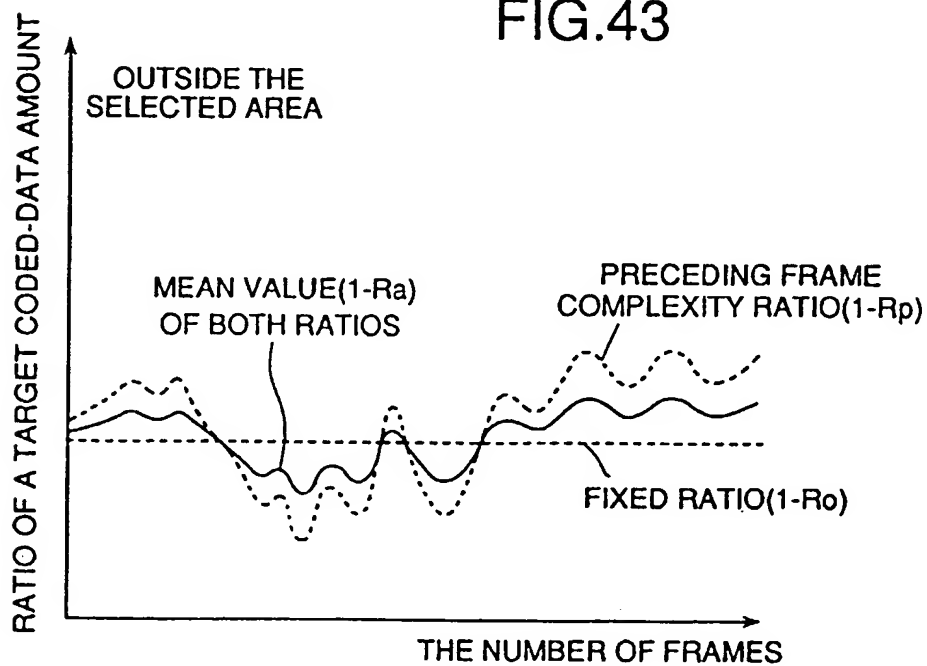
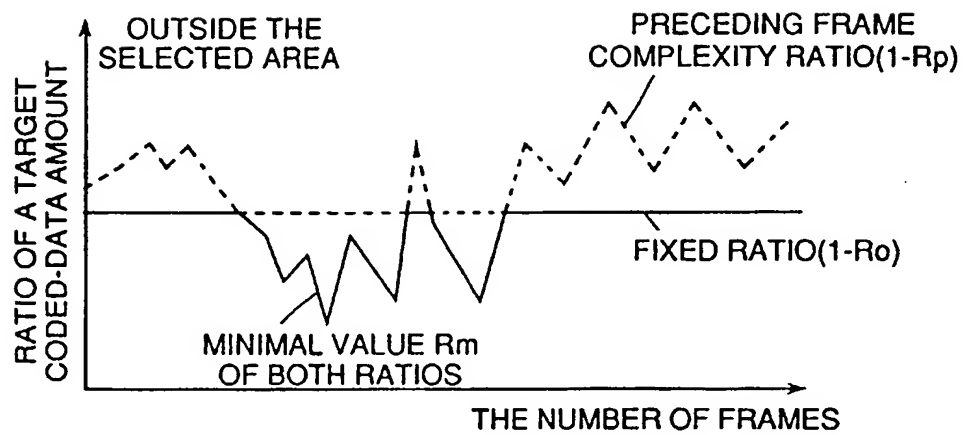


FIG.44





(11) **EP 0 753 970 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
 25.08.1999 Bulletin 1999/34

(51) Int Cl.<sup>6</sup>: **H04N 7/26**

(43) Date of publication A2:  
 15.01.1997 Bulletin 1997/03

(21) Application number: **96305038.0**

(22) Date of filing: **09.07.1996**

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **14.07.1995 JP 17864295**  
**14.07.1995 JP 17864395**  
**24.10.1995 JP 27550195**

(71) Applicant: **SHARP KABUSHIKI KAISHA**  
**Osaka-shi, Osaka-fu 545-0013 (JP)**

(72) Inventors:  
 • **Katata, Hiroyuki**  
**Chiba-shi, Chiba (JP)**

• **Kusao, Hiroshi**  
**Chiba-shi, Chiba (JP)**  
 • **Ito, Norio**  
**Chiba-shi, Chiba (JP)**  
 • **Nomura, Toshio**  
**Ichihara-shi, Chiba (JP)**

(74) Representative: **Brown, Kenneth Richard et al**  
**R.G.C. Jenkins & Co.**  
**26 Caxton Street**  
**London SW1H 0RJ (GB)**

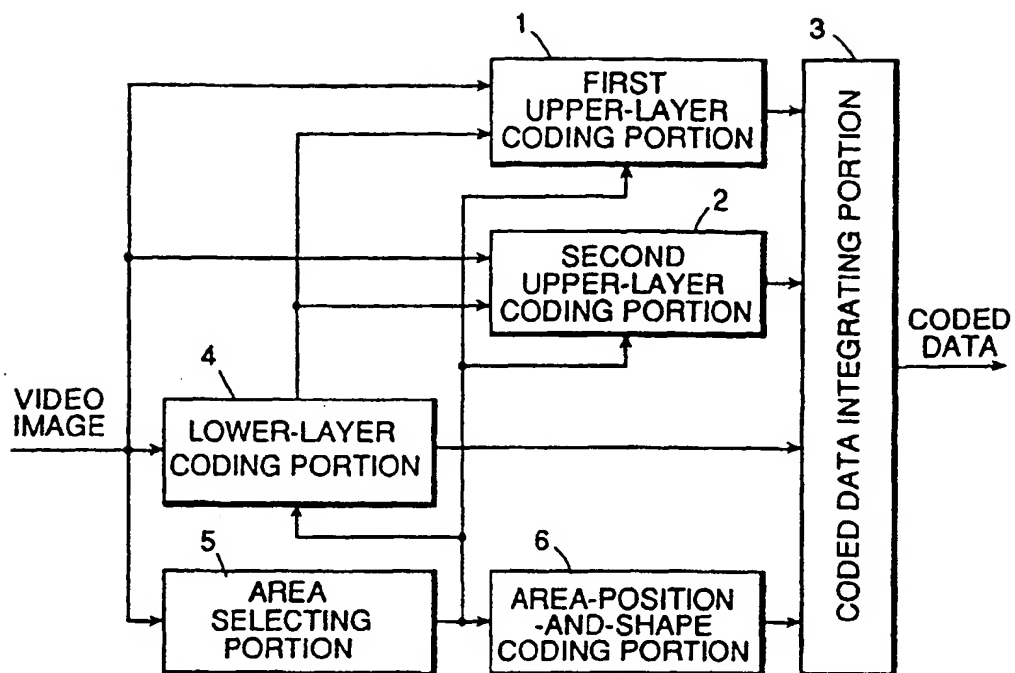
(54) **Hierarchical video coding device and decoding device**

(57) In a video coding device capable of making coded data have a hierarchical structure, a specified area of each frame is selected, the position and the shape of the selected area are encoded, a pixel value of the selected area is encoded as lower-layer coded data, a pixel value of a whole image is encoded as first upper-layer coded data by using pixel values of already decoded images of the lower-layer and the first upper layer and a pixel value of the selected area is encoded as second upper-layer coded data by using pixel values of already decoded images of the lower-layer and the second upper layer. By the video coding device and video decoding device mentioned above, decoding a part of coded data makes it possible to reproduce only a selected area of a lower image-quality or reproduce a whole image of a lower image-quality or reproduce a whole image with a selected area of a higher image-quality and other areas of a lower image-quality. In encoding and decoding a background video-sequence and a plurality of foreground part-video-sequences, a coding device (101, 102, 103, 122, 123, 120) encodes position information of part-video-sequences and a decoding device (105, 106, 107, 108, 109, 110, 124, 125, 121) prepares weight values necessary for weighted-mean image synthesizing on the basis of the coded data of the position information data, whereby each part-video-sequences is synthesized with the background video-sequence by using the weighted mean values. And

in laying a plurality of part-video-sequences over a background video-sequence by using weighted mean values, an amount of coded data can be reduced because the weighted mean values are prepared from binarized information. Furthermore, a synthesized video-sequence has a smoothed boundary between the part images and the background image can be smoothly synthesized without any visual defect since the weighted mean data prepared from the binarized information gets a value of 0 to 1. In synthesizing an lower-layer frame from preceding and proceeding lower-layer frames by using a first part-area-information and a second part-area-information of lower-layer frames existing temporally before and after the synthesizable frame, the temporally preceding and proceeding lower-layer frames previously averaged with weight is used for synthesizing an overlapped portion of a first part-area with a second part-area or an area not belonging to the first part-area and the second part-area on the synthesizable frame, the temporally proceeding lower-layer frame used for synthesizing an area belonging to the first part-area only and the temporally preceding lower-layer frame is used for synthesizing an area belonging to the second part-area only. By the video coding device and video decoding device with the synthesizing method as above described, the synthesizing image is free from the distortion occurred in the prior art image aforementioned.

**EP 0 753 970 A3**

FIG.5





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 96 30 5038

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	W0 94 11993 A (MULTIMEDIA SYSTEMS CORP) 26 May 1994 (1994-05-26) * page 7, line 10 - page 16, line 9 *	1-6	H04N7/26
Y	EP 0 634 872 A (SONY CORP) 18 January 1995 (1995-01-18) * page 4, line 5 - page 6, line 58; figures 1-5 *	1-6	
A	MUSMANN H G ET AL: "OBJECT-ORIENTED ANALYSIS-SYNTHESIS CODING OF MOVING IMAGES" SIGNAL PROCESSING: IMAGE COMMUNICATION, vol. 1, 1 January 1989 (1989-01-01), pages 117-138, XP000519208 * page 117, paragraph 1 - page 122, paragraph 3 *	1	
A	EP 0 634 871 A (AT & T CORP) 18 January 1995 (1995-01-18) * claims; figures 10-17 *	1	
A	US 5 117 287 A (KOIKE ATSUSHI ET AL) 26 May 1992 (1992-05-26) * the whole document *	1	
A	SUN ET AL.: "MPEG Video Coding with Temporal Scalability" ICC '95, vol. 3, 18 June 1995 (1995-06-18), pages 1742-1746, XP002095106 Seattle, WA, USA * the whole document *	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H04N
-The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 1 March 1999	Examiner FOGLIA, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (PUC001)



European Patent  
Office

Application Number

EP 96 30 5038

#### CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

#### LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☒ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:

1 - 6



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 96 30 5038

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	<p>DELGROSSI ET AL.: "Media Scaling for Audiovisual Communication with the Heidelberg Transport System"</p> <p>ACM MULTIMEDIA 93, 2 August 1993 (1993-08-02), pages 99-104, XP002095107 Anaheim, CA, USA * page 100, paragraph 2.1 *</p> <p>-----</p>	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
-The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>1 March 1999</b>	Examiner <b>FOGLIA, P</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/92 (P/MC01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 96 30 5038

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

01-03-1999

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9411993	A	26-05-1994	AU 694096 B	16-07-1998
			AU 5604394 A	08-06-1994
			CA 2148091 A	26-05-1994
			EP 0670096 A	06-09-1995
			JP 8503347 T	09-04-1996
			NZ 258398 A	24-06-1997
			US 5845088 A	01-12-1998
			US 5745379 A	28-04-1998
-----				
EP 0634872	A	18-01-1995	JP 7079440 A	20-03-1995
			US 5706367 A	06-01-1998
-----				
EP 0634871	A	18-01-1995	CA 2126467 A	14-01-1995
			JP 7170514 A	04-07-1995
			US 5742343 A	21-04-1998
-----				
US 5117287	A	26-05-1992	JP 2082244 C	23-08-1996
			JP 3253190 A	12-11-1991
			JP 8002107 B	10-01-1996
-----				

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**